

Please be aware that all colors of the products which are listed in the catalogue may be a little different from the real products, because of the photography and printing process.


All products which are listed in the catalogue are subject to the real products. If any changes, correction and alteration on product and price will be occur, please note that is not our obligations to inform you.

All rights reserved, no copy allowed.



SERON[®]
LIGHTS

.....lightning your life, forever



KAILASH MARKETING
MUMBAI-400002,INDIA
EMAIL:
SERON11@YAHOO.COM
SERONLIGHTS11@GMAIL.COM
WWW.SERONLIGHTS.IN



SERON[®]
LIGHTS

.....lightning your life, forever

2026

COMMERCIAL LIGHT CATALOGUE




SERON[®]
LIGHTS

.....lightning your life, forever

YOU MAY MAP OUT A FIGHT PLAN OR A LIFE PLAN,
BUT WHEN THE ACTION STARTS,
IT MAY NOT GO THE WAY YOU PLANNED,
AND YOU ARE DOWN TO YOUR REFLEXES.
THAT'S WHERE YOUR ROAD WORK SHOWS.
IF YOU CHEATED ON THAT IN THE DARK OF THE MORNING,
WELL, YOU'RE GOING TO GET FOUND OUT NOW,
UNDER THE BRIGHT LIGHTS.

SERON
QUALITY SUPPLIER FOR YOU.
ONLY FOCUS ON LED COMMERCIAL LIGHTING

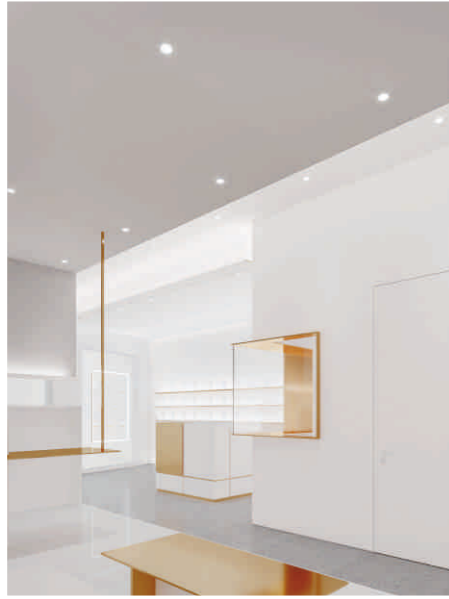

PAGE 001-069

COB SPOT LIGHT



PAGE 070-089

LED PULL LIGHT



PAGE 079-086

LED MATRIX FITTING




PAGE 121-129

LED DOWNLIGHT



PAGE 130-142

LED PANEL LIGHT

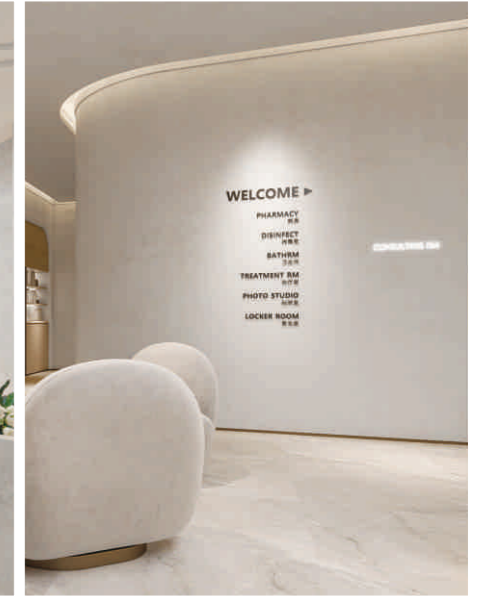

PAGE 143-146

LED ZOOM LIGHT




PAGE 087-097

LED MAGNETIC LIGHT



PAGE 098-113

LED WALL SURFACE LIGHT

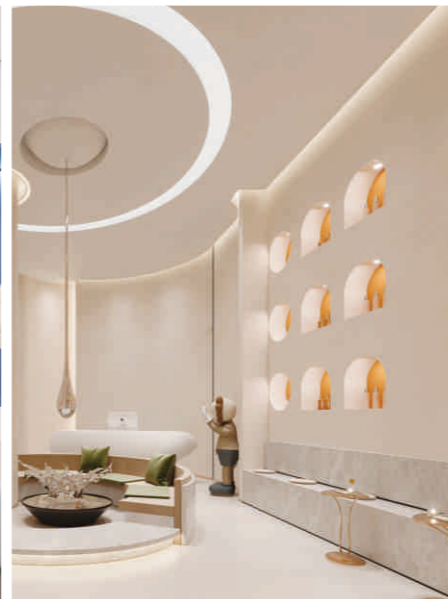


PAGE 114-120

LED MR-16 LAMP & STEAM PROOF LIGHT



PAGE 147-160

LED TRACK LIGHT

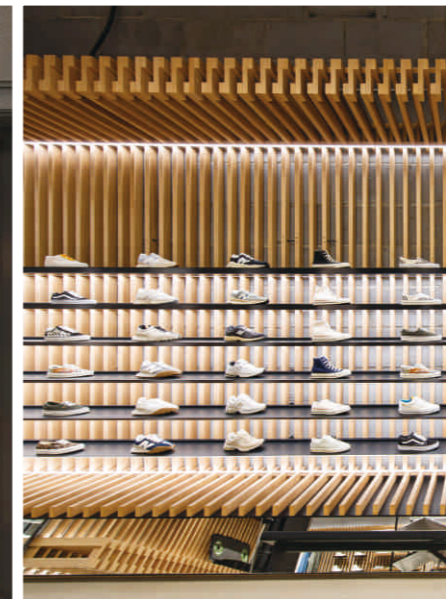

PAGE 161-174

LED STRIP & DRIVER



PAGE 175-178

EMPTY HOUSING



SRL 003

Color Temp: 3000K

Led Source: Epistar

Power: 3W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
3W	Φ68*H100	Φ55	24°

COLOR



White

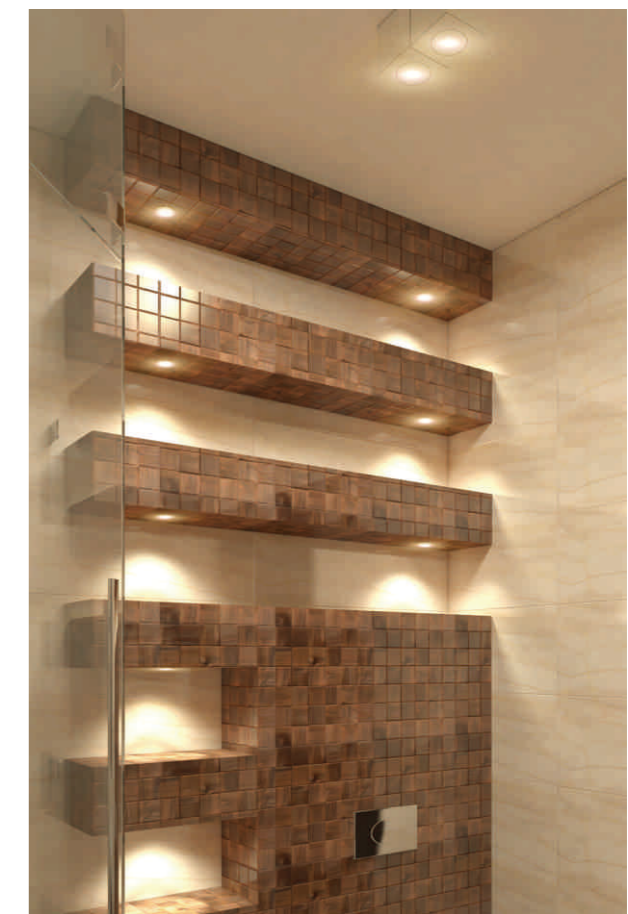

COB
SPOTLIGHT



SRL 156

Color Temp: 3000K/6000K


Led Source: Epistar

Power: 5W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
5W	L70*W70*H32	L65*W65	105°

COLOR



White



SRL 156S

Color Temp: 3000K/6000K

Led Source: Epistar

Power: 3W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
SRL 156S-3W	L40*W40*H25	L35*W35	104°

COLOR



White





SRL 157

Color Temp: 3000K/6000K

Led Source: Epistar

Power: 5W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
SRL 157-5W	Φ70*H32	Φ65	105°

COLOR



White



SRL 157S

Color Temp: 3000K/6500K

Led Source: Epistar

Power: 3W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
3W	Φ40*H25	Φ35	104°

COLOR



White





SRL 170(DOB)

Color Temp: 3000K/4000K

Led Source: Bridgelux

Power: 3W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
3W	Φ34*H18	Φ25	60°



SRL 171

Color Temp: 3000K/4000K

Led Source: Bridgelux

Power: 3W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
3W	Φ32*H15	Φ25	38°


COLOR



White



Black

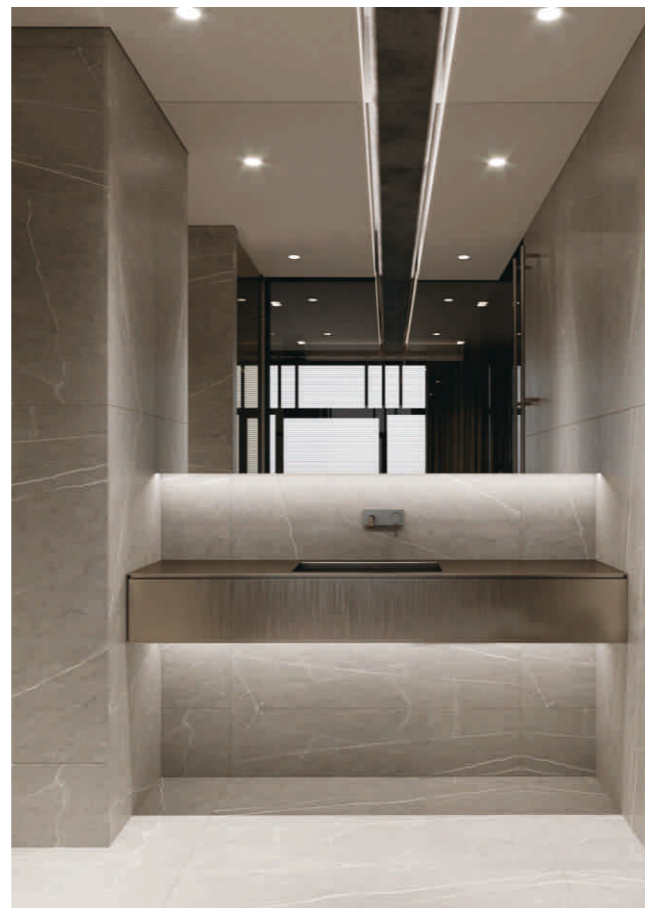

COLOR



White



Black





SRL 175

Color Temp: 3000K/4000K/6000K

Led Source: Bridgelux

Power: 3W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
3W	Φ37*H30	Φ30	38°

COLOR



White



Black



Rose Gold



Gun Black



Gold



SRL 207

Color Temp: 3000K/4000K

Led Source: Bridgelux COB

Power: 7W/12W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ44*H65	Φ55	36°
12W	Φ44*H100	Φ55	36°


COLOR



White



Black

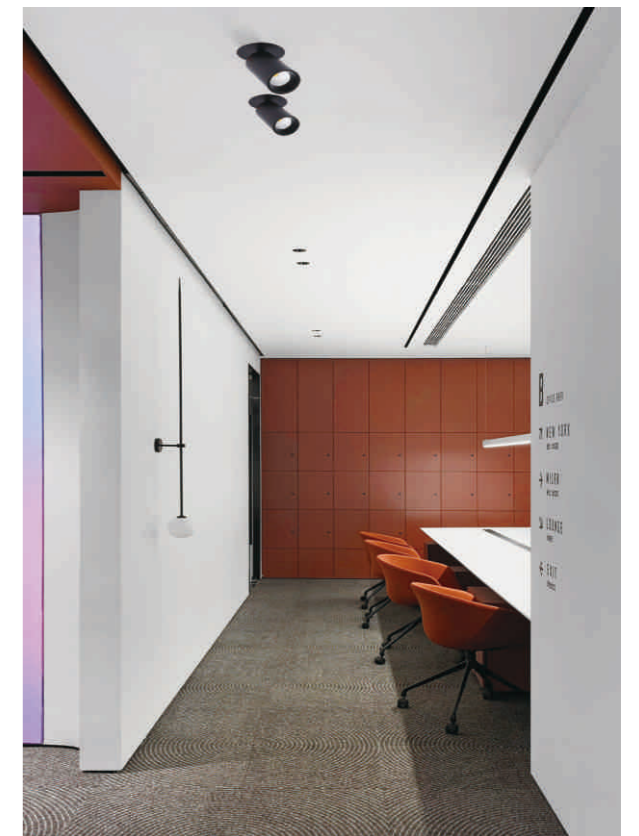



SRL 301

Color Temp: 3000K/4000K/5000K

Led Source: Citizen

Power: 8W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
8W	Φ80*H26	Φ60	20°/40°

COLOR



Silver



SRL 303

Color Temp: 3000K/4000K/6000K

Led Source: Epistar

Power: 7W/12W/18W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ85*H52	Φ75	120°
12W	Φ100*H59	Φ85	120°
18W	Φ126*H67	Φ105	120°

COLOR



Gun Black





SRL 304

Color Temp: 3000K/4000K/6000K

Led Source: Bridgelux COB

Power: 7W/12W/18W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ63*H52	Φ55	38°
12W	Φ85*H64	Φ75	38°
18W	Φ102*H74	Φ90	38°

COLOR



White



SRL 305

Color Temp:

3000K/4000K/6000K/CCT/3 IN 1

Led Source: Bridgelux COB

Power: 7W/12W/18W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ62*H59	Φ55	38°
12W	Φ85*H64	Φ75	38°
18W	Φ105*H72	Φ95	38°


COLOR



White



Black

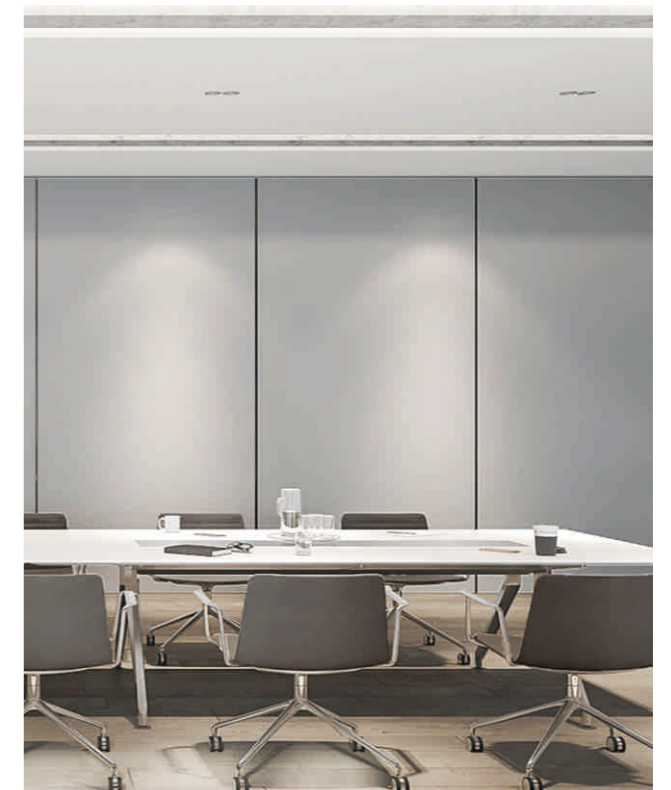



SRL 306

Color Temp: 3000K/4000K

Led Source: Bridgelux COB

Power: 9W/16W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
9W	Φ75*H72	Φ65	38°
16W	Φ105*H98	Φ95	38°


COLOR



White



Gun Black

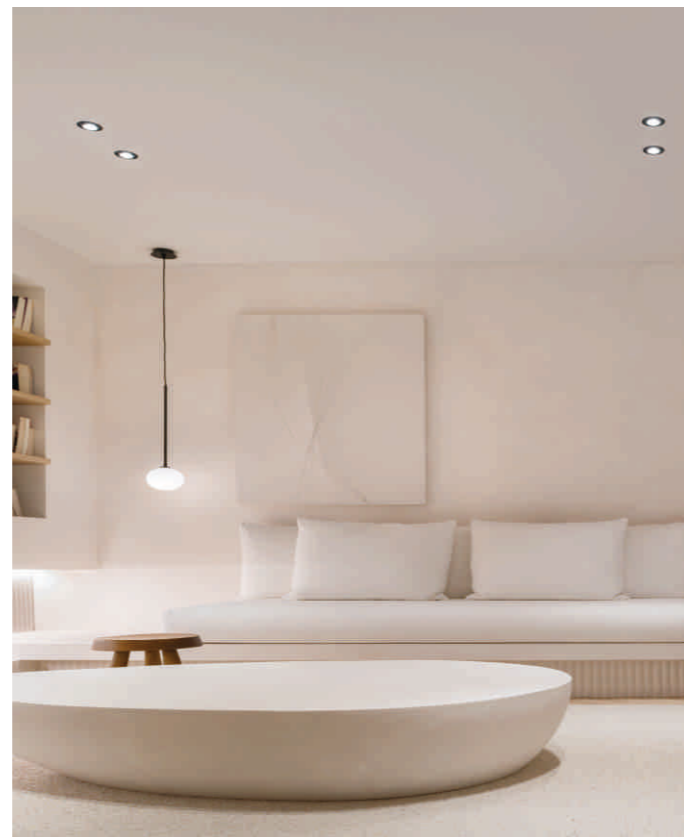

SRL 307

Color Temp: 3000K/4000K/6000K

Led Source: Bridgelux COB

Power: 9W/15W/30W/50W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
9W	Φ60*H55	Φ55	38°
15W	Φ80*H62	Φ75	38°
30W	Φ105*H83	Φ95	38°
50W	Φ135*H90	Φ125	38°

COLOR



White

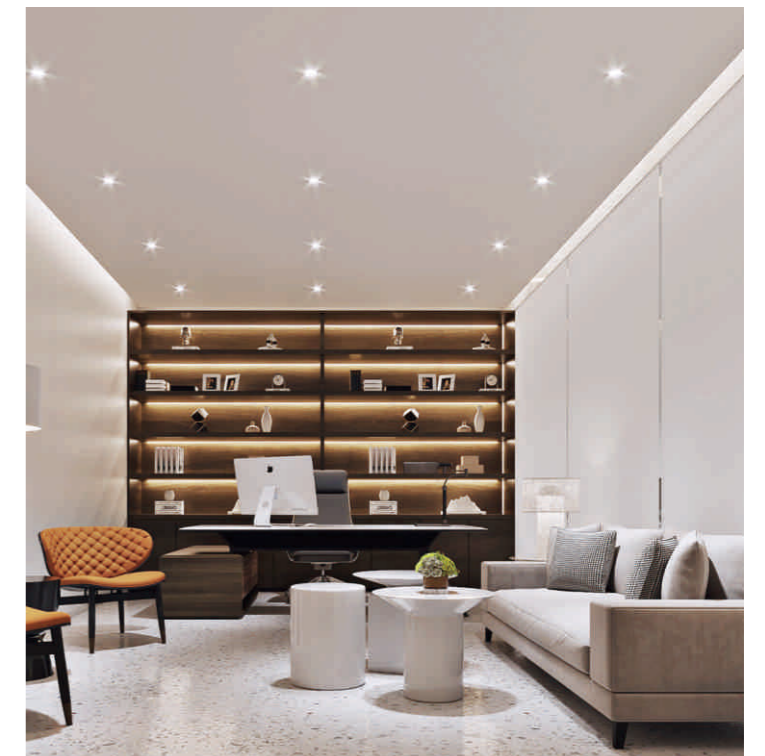



SRL 308

Color Temp: 3000K/4000K
Led Source: Bridgelux COB
Power: 9W/15W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
9W	Φ60*H78	Φ55	38°
15W	Φ70*H78	Φ65	38°

COLOR



White



Gun Black



SRL 309

Color Temp: 3000K/4000K
Led Source: Bridgelux COB
Power: 16W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
SRL 309-16W	Φ75*H78	Φ65	38°

COLOR



White





SRL 310

Color Temp: 3000K/4000K/CCT

Led Source: Bridgelux COB

Power: 9W/15W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
9W	Φ60*H55	Φ55	38°
15W	Φ80*H62	Φ75	38°

COLOR



White



Black



Antique Gold



Gun Black



SRL 311

Color Temp: 3000K/4000K/6000K

Led Source: Bridgelux

Power: 7W/12W/18W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ45*H50	Φ38	38°
12W	Φ60*H67	Φ52	38°
18W	Φ77*H75	Φ65	38°


COLOR



White



Gun Black

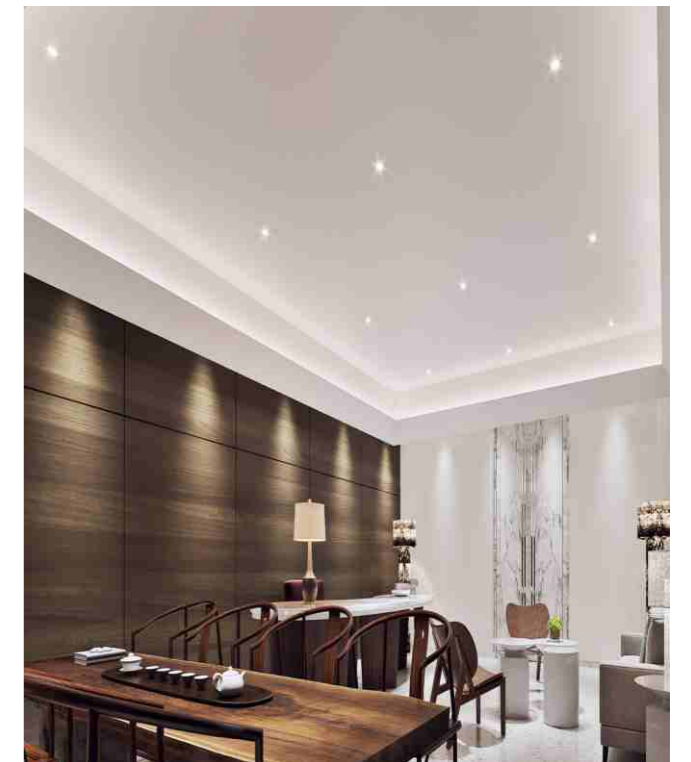



SRL 312

Color Temp: 3000K/4000K

Led Source: Bridgelux

Power: 7W/12W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ65*H75	Φ55	38°
12W	Φ82*H96	Φ75	38°

COLOR



Gun Black



Chrome



White



SRL 313

Color Temp: 3000K/4000K

Led Source: Bridgelux

Power: 8W/15W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
8W	Φ60*H63	Φ50	38°
15W	Φ70*H78	Φ60	38°


COLOR



White



Black

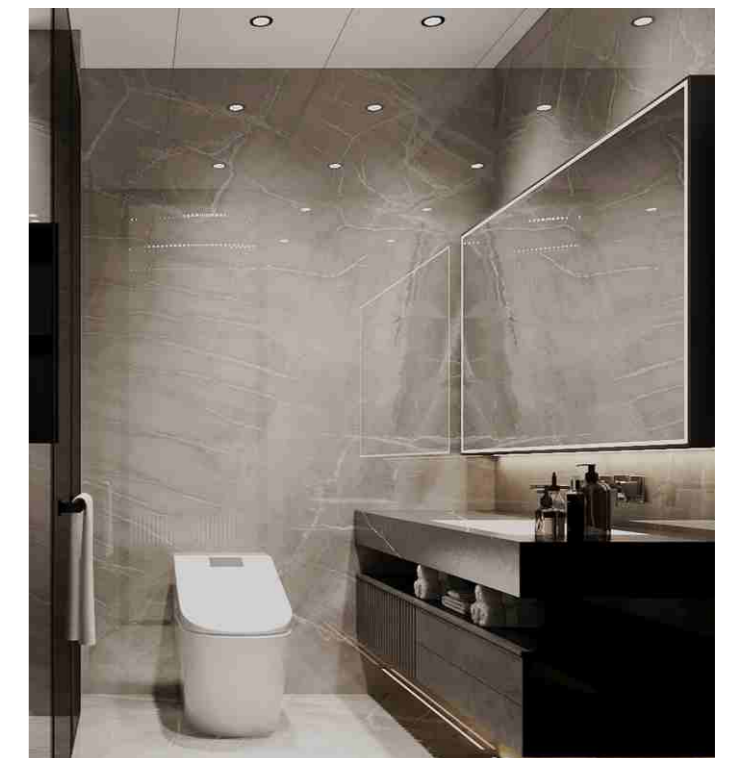



SRL 314

Color Temp: 3000K/4000K

Led Source: Bridgelux

Power: 6W/12W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
6W	Φ42*H51	Φ35	24°
12W	Φ62*H62	Φ55	24°

COLOR



White



SRL 315

Color Temp: 3000K/4000K

Led Source: Bridgelux

Power: 9W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
9W	Φ50*H80	Φ40	38°

COLOR



White





.....lightning your life, forever



SRL 317A-12W

Color Temp: 3000K/4000K

Led Source: LEDVANCE COB

Power: 12W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	Φ75*H78	Φ65	38°

COLOR



White





SRL 318

Color Temp: 3000K/4000K/6000K

Led Source: Bridgelux

Power: 12W/18W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	Φ80*H50	Φ75	38°
18W	Φ100*H62	Φ95	38°

COLOR



White

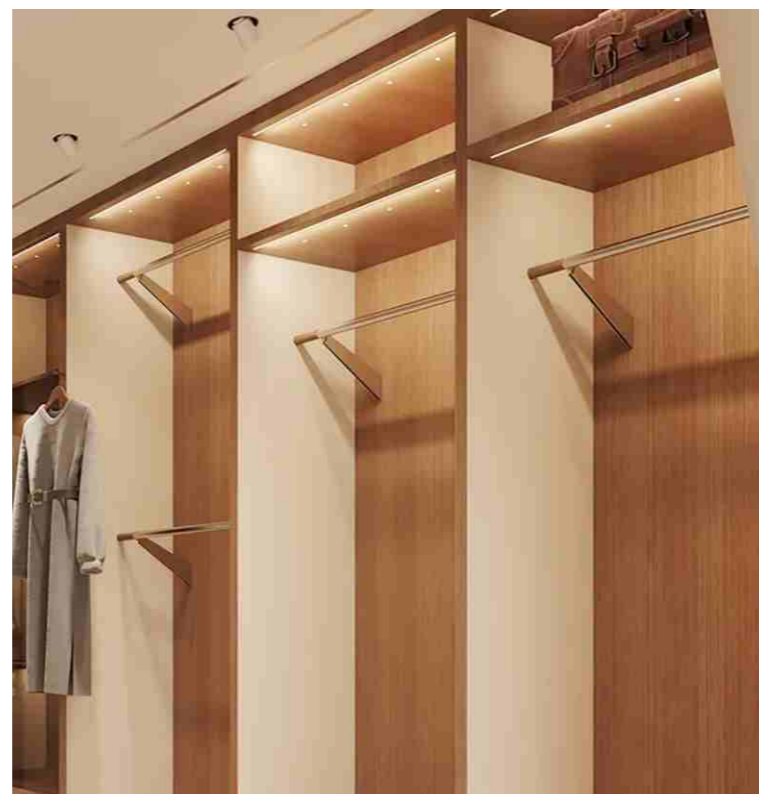

SRL 319

Color Temp: 3000K/4000K

Led Source: Bridgelux

Power: 7W/12W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ40*H76.5	Φ35	24°/38°
12W	Φ50*H88.5	Φ45	24°/38°

COLOR



White

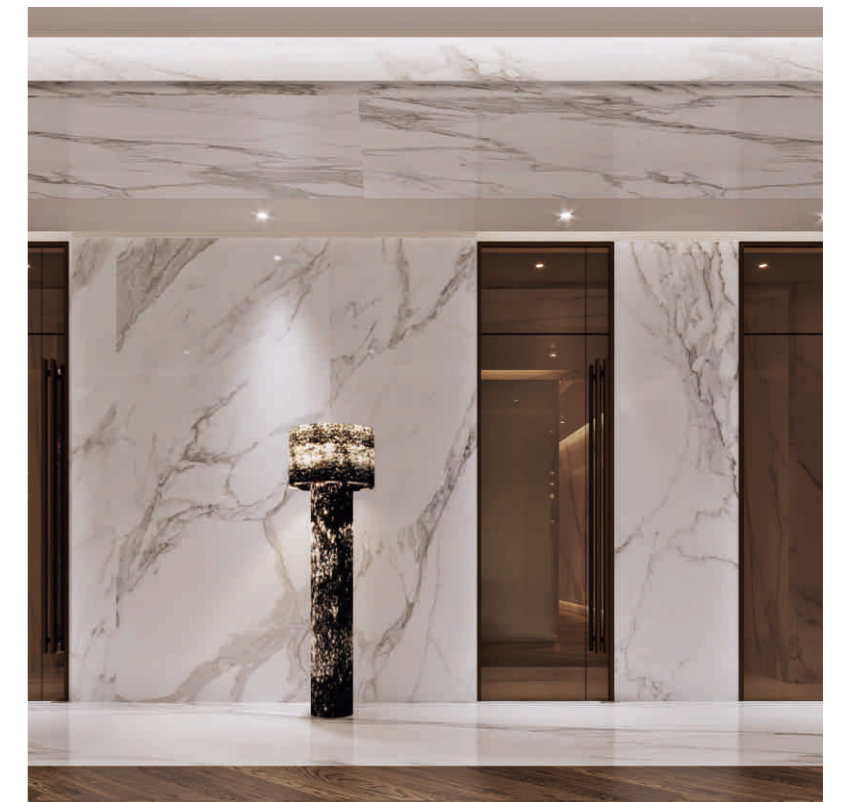



SRL 371

Color Temp: 3000K/4000K/6000K

Led Source: Bridgelux COB

Power: 7W/12W/18W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ65*H53	Φ58	38°
12W	Φ80*H75	Φ70	38°
18W	Φ95*H95	Φ83	38°

COLOR



White



Black



Rose Gold



Gun Black



Gold



SRL 371

Color Temp: 3 IN 1/CCT

Led Source: Bridgelux COB

Power: 7W/12W/18W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ65*H53	Φ58	38°
12W	Φ80*H75	Φ70	38°
18W	Φ95*H95	Φ83	38°


COLOR



White



Black

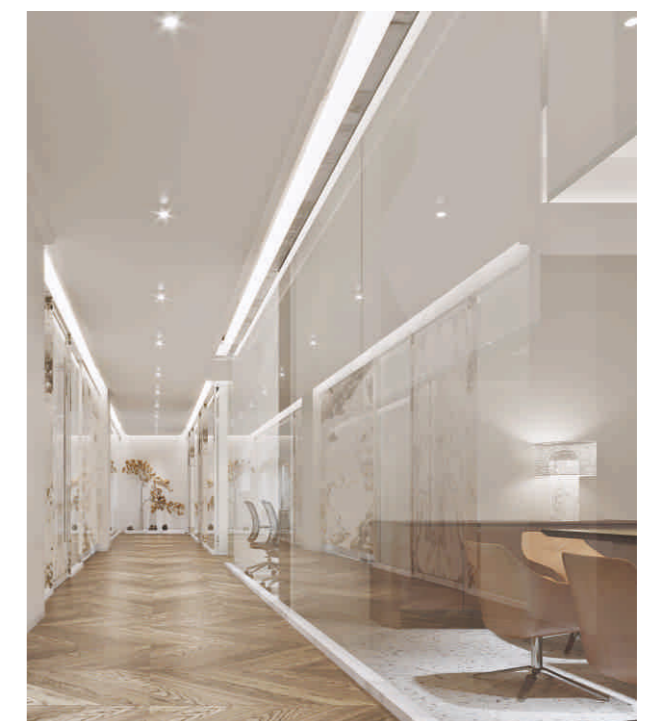



SRL 372

Color Temp: 3000K/4000K/6000K

Led Source: Bridgelux COB

Power: 7W/12W/18W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ70*H55	Φ60	38°
12W	Φ85*H65	Φ75	38°
18W	Φ95*H75	Φ85	38°

COLOR



White+Rose Gold



White+Gun Black



Black+Rose Gold



Black+Gun Black



SRL 372

Color Temp: CCT/3 IN 1

Led Source: Bridgelux COB

Power: 7W/12W/18W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ70*H55	Φ60	38°
12W	Φ85*H65	Φ75	38°
18W	Φ95*H75	Φ85	38°

COLOR



White+Rose Gold



White+Gun Black



Black+Rose Gold



Black+Gun Black



SRL 373

Color Temp: 3000K/4000K/6000K

Led Source: Bridgelux COB

Power: 5W/12W/18W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
5W	Φ65*H63	Φ55	38°
12W	Φ85*H85	Φ75	38°
18W	Φ105*H95	Φ95	38°

COLOR



White



SRL 374

Color Temp: 3000K/4000K

Led Source: Bridgelux

Power: 8W/15W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
8W	Φ56*H73	Φ45	38°
15W	Φ66*H78	Φ55	38°

COLOR

SRL 374A



White



Gun Black

SRL 374B



White



Gun Black





SRL 375

Color Temp: 3000K/4000K/6000K

Led Source: Bridgelux

Power: 7W/12W/18W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ43*H86	Φ35	38°
12W	Φ63*H94	Φ55	38°
18W	Φ82*H101	Φ75	38°

COLOR

SRL 375A



White

SRL 375B



White



SRL 570

Color Temp: 3000K/4000K/6500K

Led Source: CREE

Power: 10W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
10W	Φ96*H48	Φ85	15°/48°

COLOR



White





SRL 355

Color Temp: 3000K/4000K

Led Source: Gree 1507

Power: 12W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	Φ86*H30	Φ80	38°

COLOR



White



Black



Rose Gold



.....lightning your life, forever

FITTING ROOM



SRL 376

Color Temp: 3000K/4000K/6500K/CCT

Led Source: Bridgelux

Power: 7W/15W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ68*H43	Φ55	36°
15W	Φ85*H50	Φ75	36°

COLOR



White

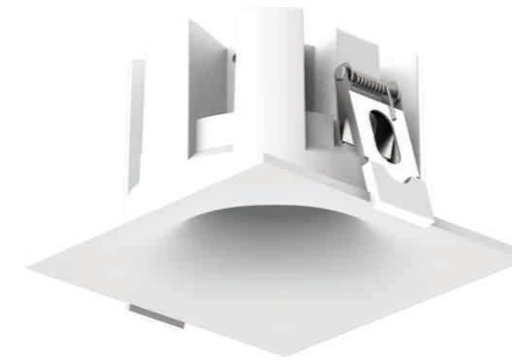

SRL 377

Color Temp: 3000K/4000K/6500K

Led Source: Bridgelux

Power: 15W

TECHNICAL DATA


Power	Size/mm	Cut Out/mm	Beam Angle
15W	L85*W85*H50	Φ75	36°

COLOR



White



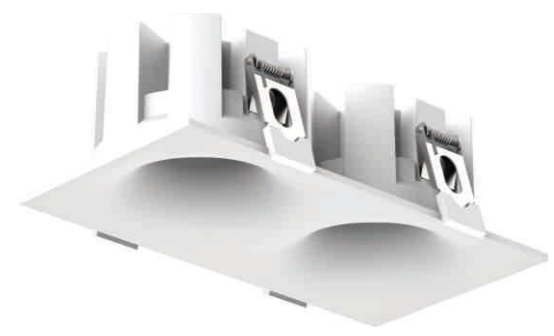

SRL 378

Color Temp: 3000K/4000K/6500K
Led Source: Bridgelux
Power: 2X12W



SRL 662

Color Temp: 3000K/4000K
Led Source: Bridgelux
Power: 2x8W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
2x12W	L165*W85*H50	L153*W75	36°


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
2x8W	L120*W65*H50	L110*W55	38°

COLOR



White

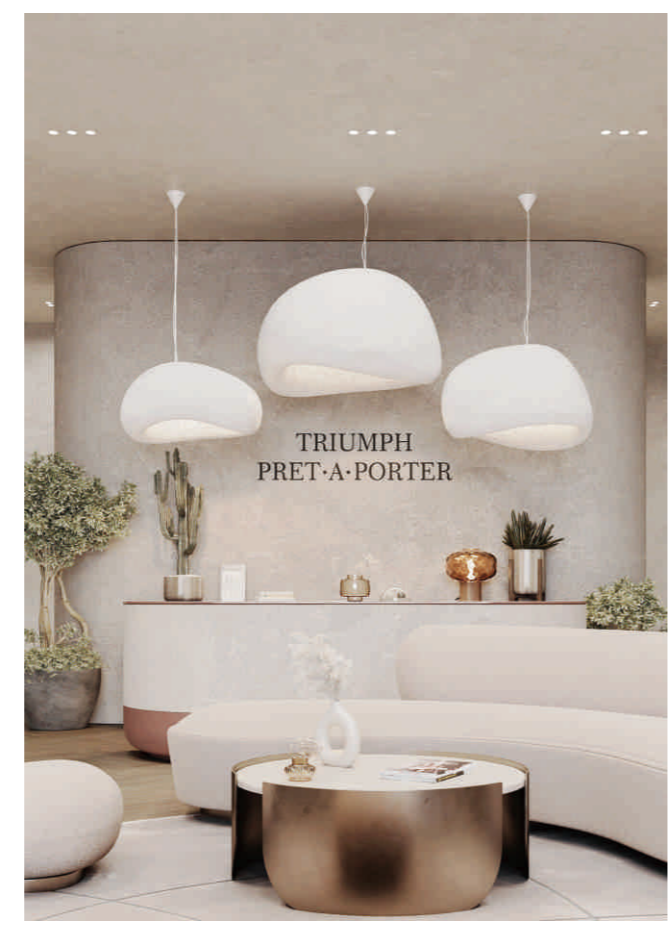

COLOR



White





SRL 379

Color Temp: 3000K/4000K/CCT

Led Source: Bridgelux

Power: 12W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	Φ86*H65	Φ80	36°

COLOR



White

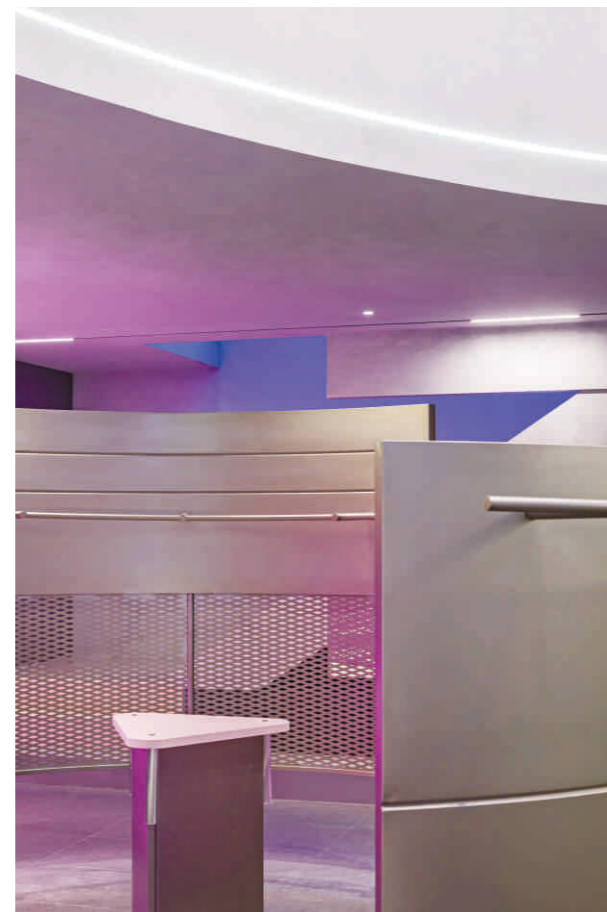

SRL 380

Color Temp: 3000K/4000K

Led Source: Bridgelux

Power: 7W/12W/18W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ70*H45	Φ55	36°
12W	Φ80*H48	Φ75	36°
18W	Φ90*H55	Φ85	36°


COLOR



White



Gun Black

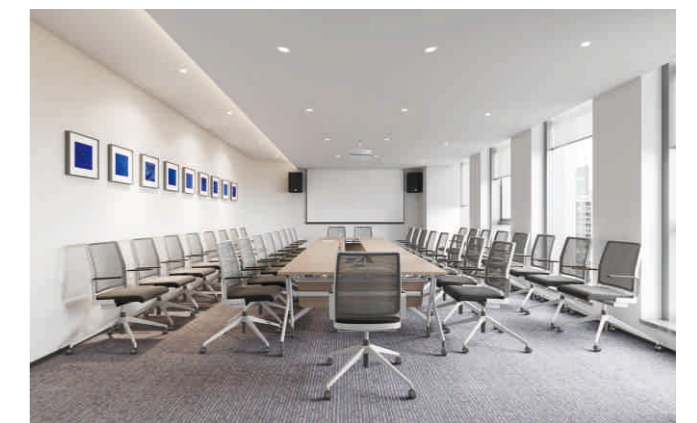



SRL 451

Color Temp: 3000K/6500K

Led Source: Epistar

Power: 5W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
SRL 451-5W	Φ90*H57	Φ80	87°



SRL 452

Color Temp: 3000K/6500K

Led Source: Epistar

Power: 5W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
5W	L90*W90*H30	Φ80	87°

COLOR



White



Silver




COLOR



White



Silver

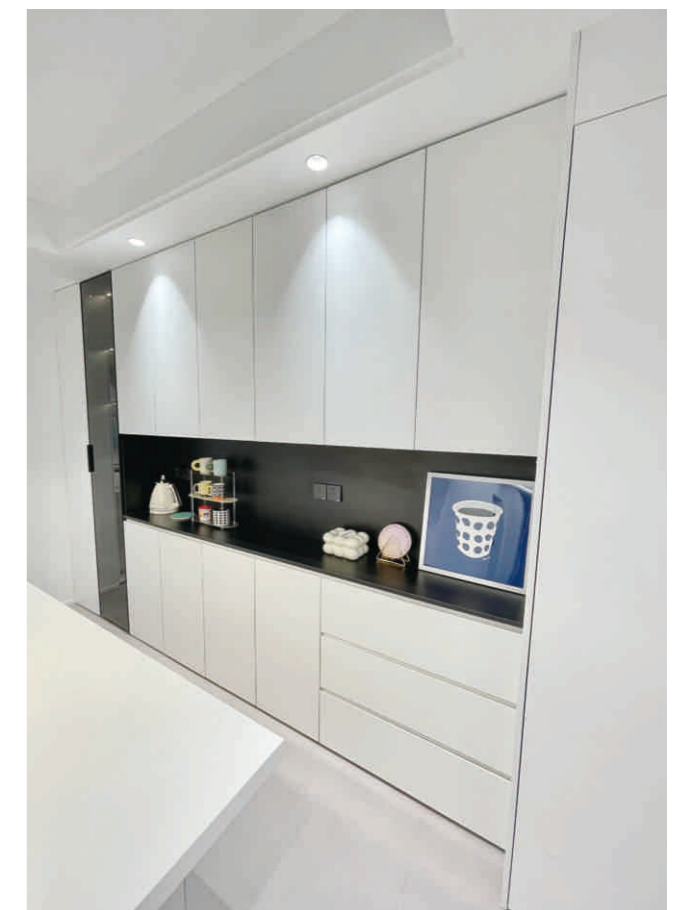



SRL 454

Color Temp: 3000K/4000K/6500K

Led Source: Sharp

Power: 8W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
8W	L103*W103*H73	Φ90	24°



SRL 455

Color Temp: 3000K/4000K/6500K

Led Source: Sharp

Power: 8W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
8W	Φ103*H73	Φ90	24°

COLOR




White



COLOR



White

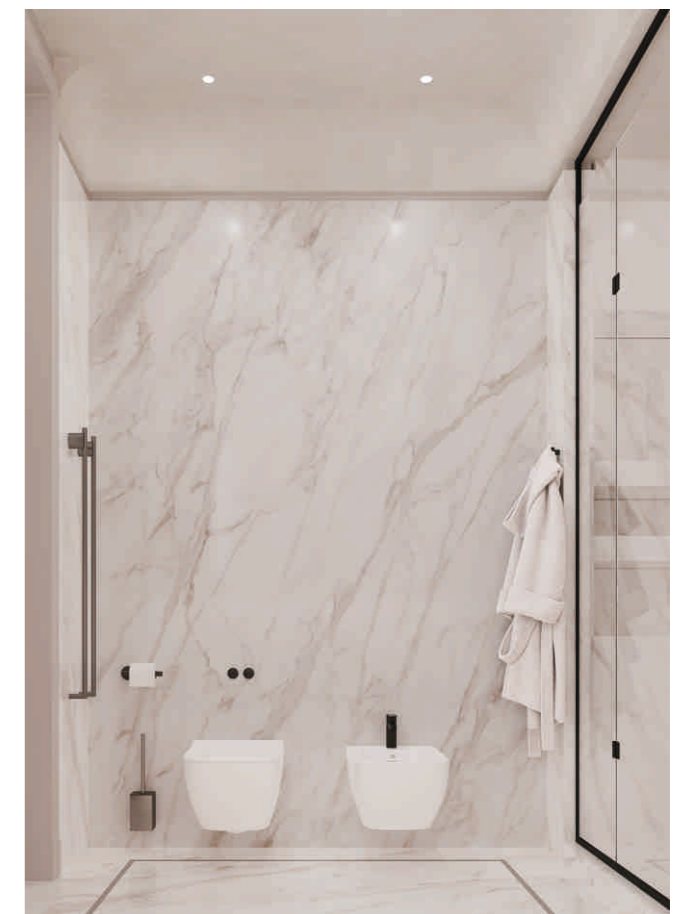



SRL 453

Color Temp: 3000K/4000K/6500K

Led Source: Epistar

Power: 5W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
5W	L90*W90*H57	Φ70	87°

COLOR



White



SRL 461

Color Temp: 3000K/5000K

Led Source: Sanan

Power: 13W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
13W	Φ90*H95	Φ80	21°

COLOR



White

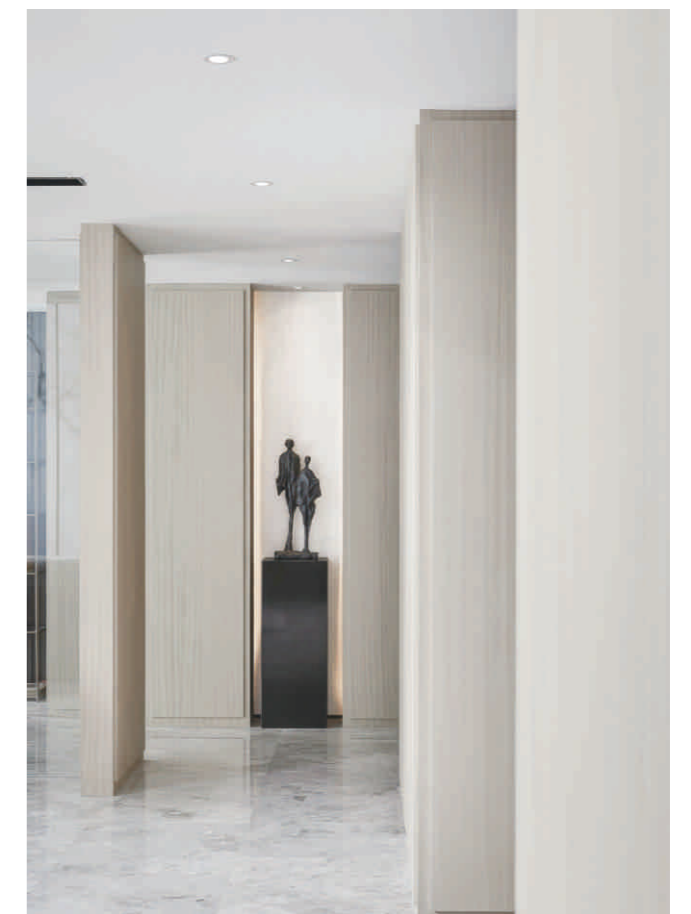



SRL 456-8W

Color Temp: 3000K/4000K/6500K

Led Source: Sharp

Power: 8W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
8W	L103*W103*H73	Φ90	24°



SRL 457-8W

Color Temp: 3000K/4000K/6500K

Led Source: Sharp

Power: 8W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
8W	Φ103*H73	Φ90	24°

COLOR




White



COLOR



White

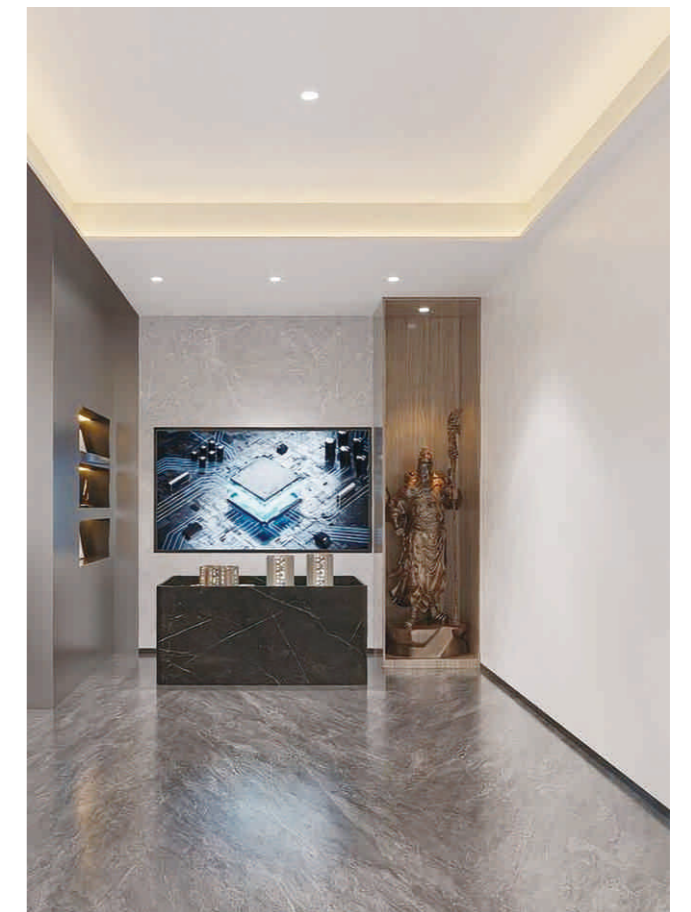



SRL 591

Color Temp: 3000K/4000K

Led Source: Samsung

Power: 14W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
4W	L110*W110	L100*W100	40°

COLOR



White



SRL 592

Color Temp: 3000K/4000K

Led Source: Samsung

Power: 2x14W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
2X14W	L210*W110	L200*W100	40°

COLOR



White

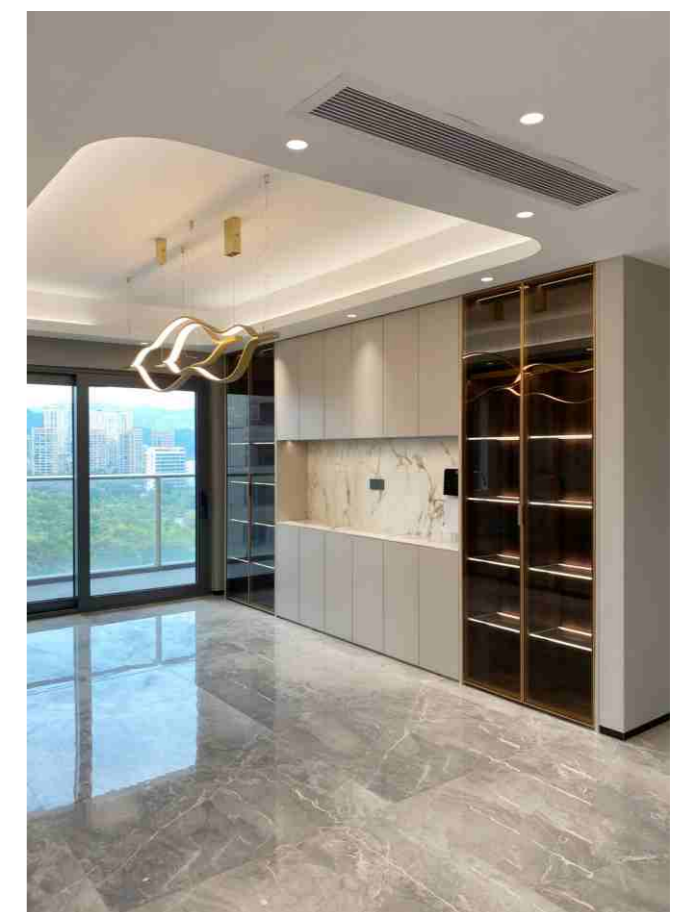



SRL 404

Color Temp: 3000K/4000K/6500K

Led Source: Samsung

Power: 12W/18W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	Φ105*H75	Φ95	65°
18W	Φ140*H85	Φ125	65°

COLOR



White



SRL 595

Color Temp: 3000K/4000K/5000K

Led Source: Samsung

Power: 15W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
15W	Φ90*H90	Φ75	40°

COLOR



White

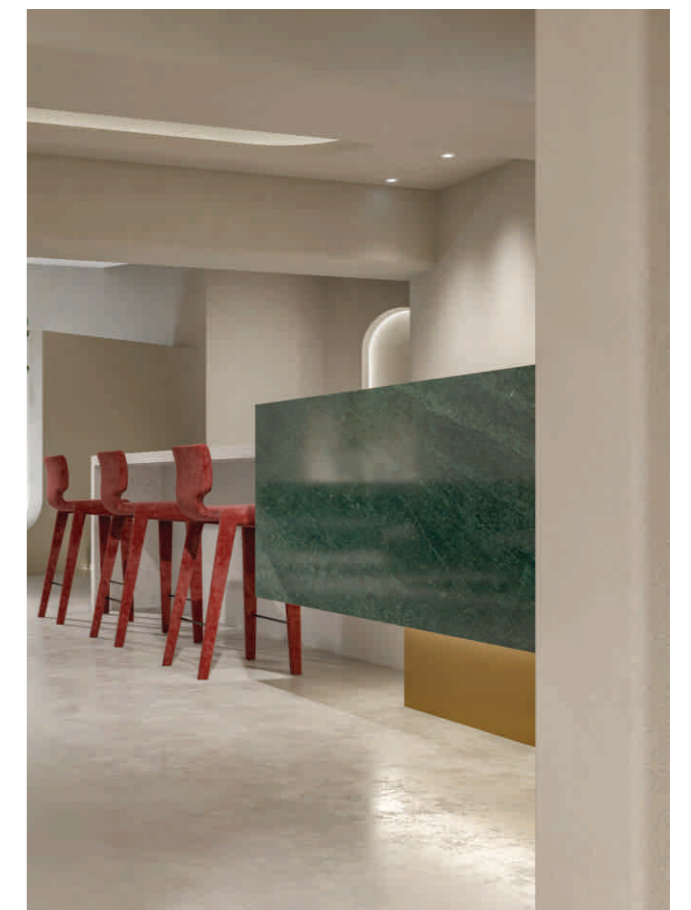



SRL 631

Color Temp: 3000K/4000K/5000K

Led Source: Samsung

Power: 35W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
35W	Φ140*H100	Φ120	40°

COLOR



White



SRL 685

Color Temp: 3000K/4000K/5000K

Led Source: Samsung COB

Power: 15W/30W/50W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
15W	Φ105*H65	Φ80	60°
30W	Φ160*H85	Φ145	60°
50W	Φ180*H90	Φ165	60°

COLOR



White





SRL 831

Color Temp: 3000K/4000K/5000K

Led Source: Samsung

Power: 12W/20W/30W/40W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	Φ90*H60	Φ75	38°
20W	Φ110*H85	Φ100	38°
30W	Φ139*H95	Φ120	38°
40W	Φ164*H110	Φ145	38°

COLOR



White



SRL 835

Color Temp: 3000K/4000K

Led Source: Luminus

Power: 12W/18W/27W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	Φ105*H75	Φ95	65°
18W	Φ140*H85	Φ125	65°
27W	Φ185*H110	Φ165	65°

COLOR



White





SRL 875

Color Temp: 3000K/4000K/5000K

Led Source: Cree

Power: 7W/12W/18W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ60*H50	Φ52	38°
12W	Φ76*H62	Φ65	38°
18W	Φ90*H87	Φ80	38°

COLOR



White



SRL 880

Color Temp: 3000K/4000K/6000K

Led Source: Cree/Bridgelux

Power: 7W/12W/18W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ65*H55	Φ55	38°
12W	Φ82*H79	Φ70	38°
18W	Φ100*H73	Φ90	38°

COLOR



White





SRL 882

Color Temp: 3000K/4000K/5000K

Led Source: Cree/Bridgelux

Power: 7W/12W/18W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ60*H44	Φ52	38°
12W	Φ76*H52	Φ65	38°
18W	Φ90*H58	Φ80	38°

COLOR



White

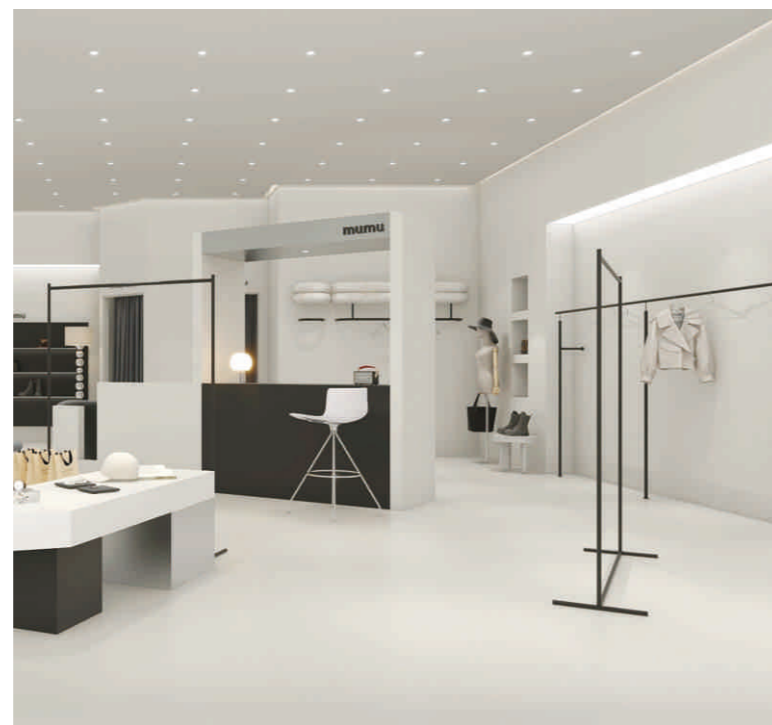

SEG 901

Color Temp: 3000K/4000K/6500K

Led Source: Bridgelux

Power: 3W/7W/12W/18W/24W/30W/40W/50W

TECHNICAL DATA


Power	Size/mm	Cut Out/mm	Beam Angle
3W	Φ64*H40	Φ55	60°
7W	Φ85*H60	Φ70	60°
12W	Φ85*H67	Φ70	60°
18W	Φ108*H70	Φ92	60°
24W	Φ136*H88	Φ116	60°
30W	Φ160*H102	Φ135	60°
40W	Φ160*H102	Φ135	60°
50W	Φ160*H102	Φ135	60°

COLOR



White



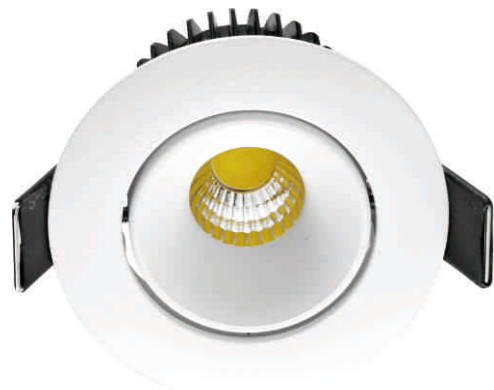

SEG 902

Color Temp: 3000K/4000K/6500K

Led Source: Bridgelux

Power: 3W/7W/12W/18W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
3W	Φ64*H46	Φ56	60°
7W	Φ85*H57	Φ70	60°
12W	Φ85*H67	Φ70	60°
18W	Φ108*H70	Φ92	60°

COLOR



White



SEG 903

Color Temp: 3000K/4000K/6500K

Led Source: Bridgelux

Power: 3W/7W/12W/18W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
3W	Φ45*H30	Φ36	60°
7W	Φ65*H42	Φ56	60°
12W	Φ82*H55	Φ71	60°
18W	Φ100*H80	Φ90	60°

COLOR



White

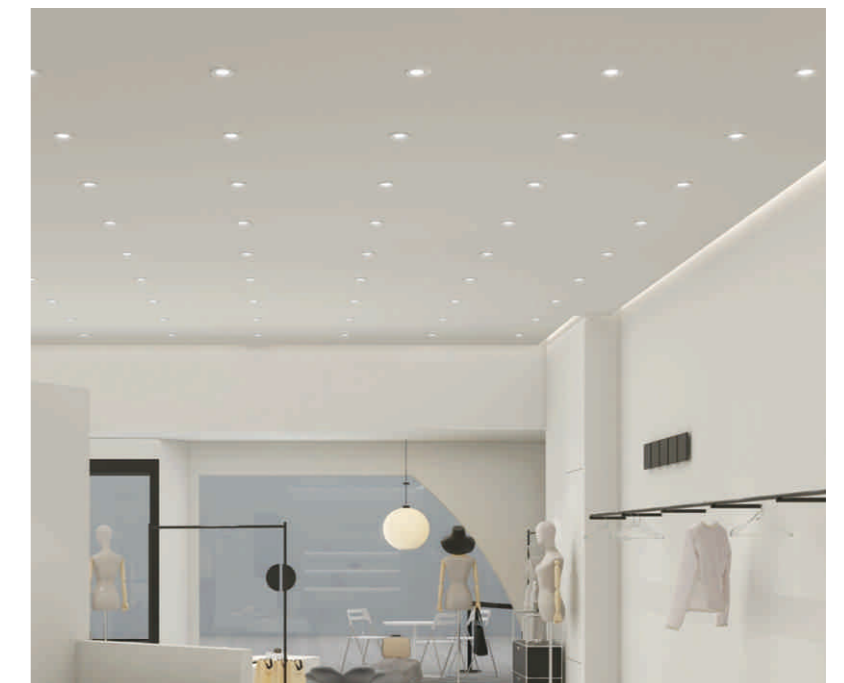



SEG 904

Color Temp: 3000K/4000K

Led Source: Bridgelux

Power: 7W/12W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	L57*W57*H64	Φ50	38°
12W	L80*W80*H83	Φ70	38°

COLOR



White



SEG 905

Color Temp: 3000K/4000K

Led Source: Bridgelux

Power: 7W/12W/18W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ80*H70	Φ66	60°
12W	Φ100*H80	Φ88	60°
18W	Φ122*H92	Φ108	60°

COLOR



White





SEG 907

Color Temp: 3000K/4000K/6500K

Led Source: Bridgelux

Power: 3W/7W/12W/18W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
3W	Φ64*H25	Φ55	60°
7W	Φ85*H32	Φ67	60°
12W	Φ107*H34	Φ88	60°
18W	Φ128*H40	Φ115	60°

COLOR



White

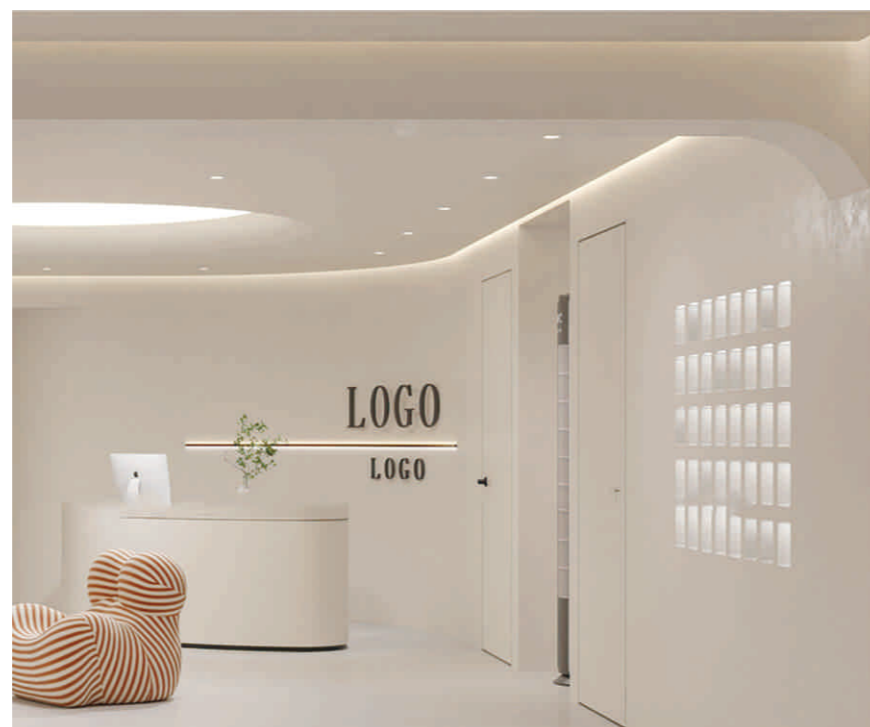

LED
PULLOUT
LIGHT





SRL 165

Color Temp: 3000K/4000K/6500K

Led Source: Bridgelux

Power: 7W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ52*H93	Φ45	38°

COLOR



White



SRL 166

Color Temp: 3000K/4000K/6500K

Led Source: Bridgelux

Power: 2X7W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
2X7W	L118*W53*H85	L110*W45	38°

COLOR



White

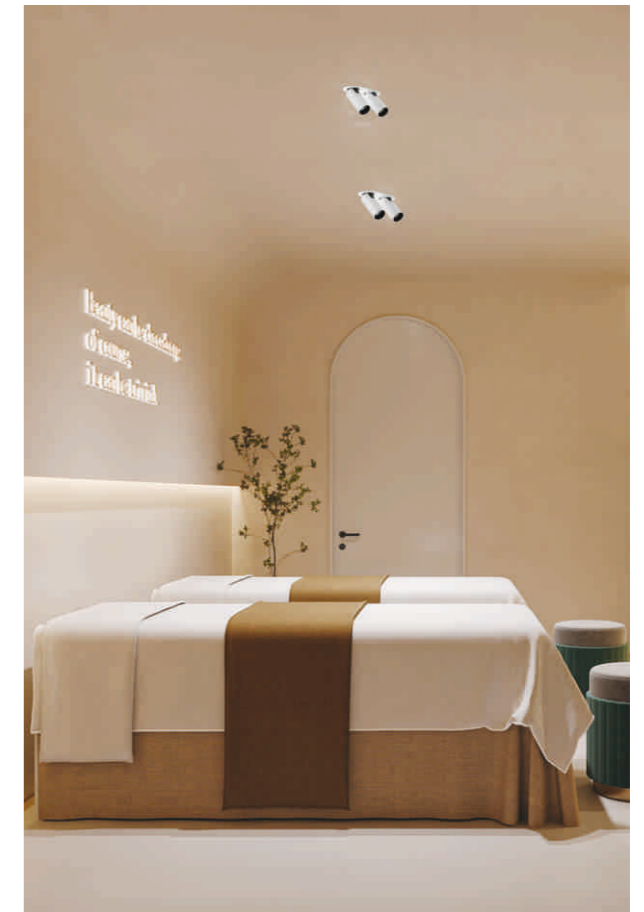



SRL 167

Color Temp: 3000K/4000K/6500K

Led Source: Bridgelux

Power: 2x7W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
2x7W	L118*W53*H85	L110*W45	38°

COLOR



White



SRL 668

Color Temp: 3000K/4000K

Led Source: 3535

Power: 6W/10W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
6W	L71*W32*H66	L64*W25	36°
10W	L111*W32*H66	L104*W25	36°

COLOR



6W-White



10W-White





SRL 745/751

Color Temp: 3000K/4000K

Led Source: Cree/Bridgelux

Power: 7W/12W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ72*H100	Φ62	36°
12W	Φ100*H110	Φ90	36°

COLOR



White

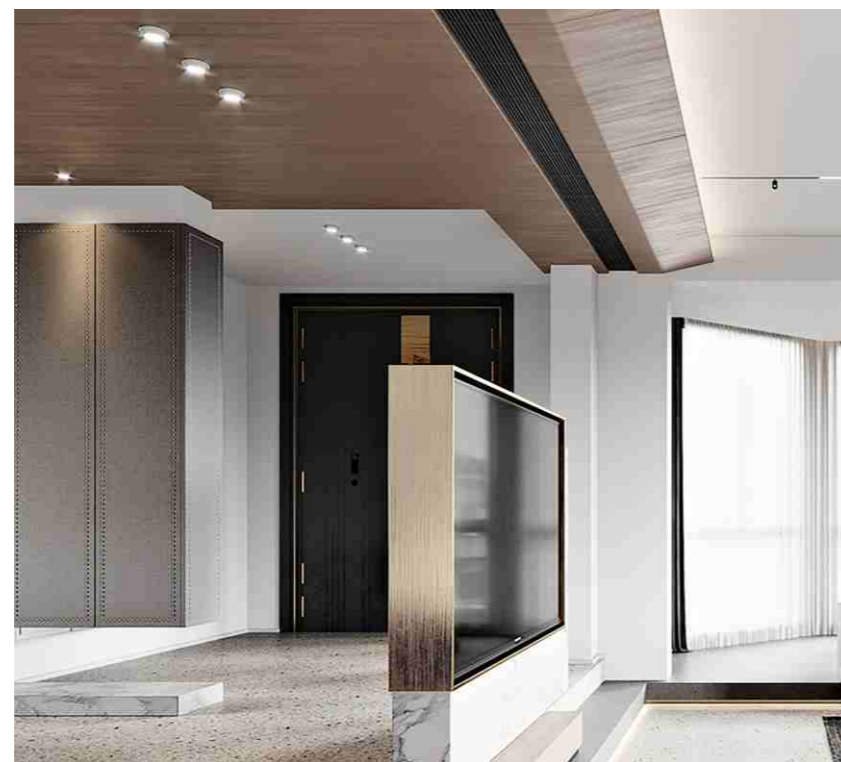

SRL 746/752

Color Temp: 3000K/4000K

Led Source: Cree/Bridgelux

Power: 7W/12W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	L72*W72*H100	Φ62	36°
12W	L100*W100*H110	Φ90	36°

COLOR



White





SRL 747/753

Color Temp: 3000K/4000K

Led Source: Cree/Bridgelux

Power: 2X7W/2X12W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
2X7W	L132*W72*H100	L122*W62	36°
2X12W	L185*W100*H110	L175*W90	36°

COLOR



White



SEG 906

Color Temp: 3000K/4000K

Led Source: Bridgelux

Power: 12W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	Φ90*H102	Φ82	60°

COLOR



White

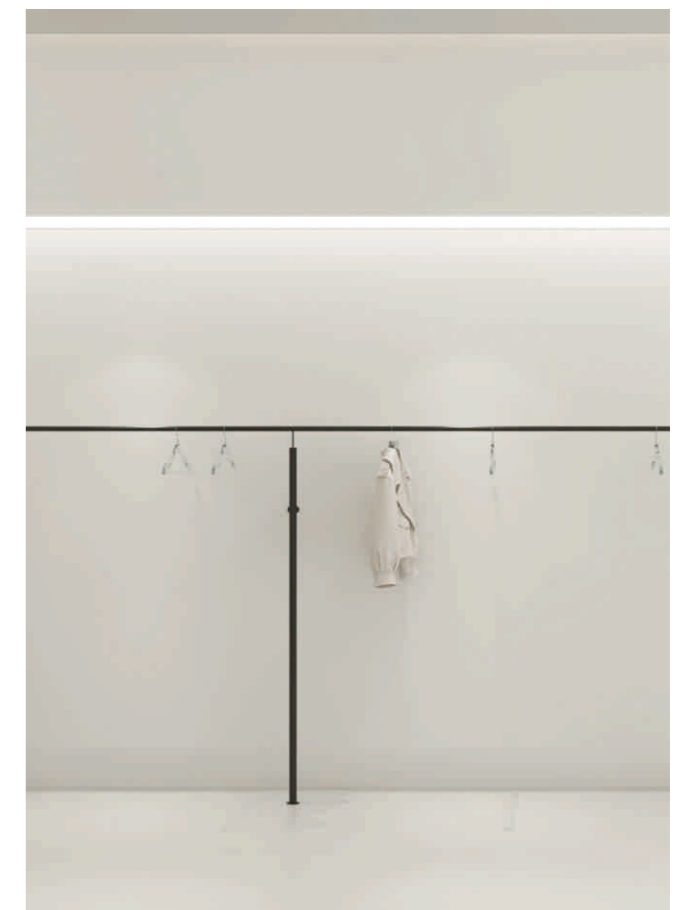

LED MATRIX FITTING



.....lightning your life, forever



SRL 755

Color Temp: 3000K/4000K

Led Source: Cree 3535

Power: 15W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
15W	L145*W45*H47	L140*W38	36°

COLOR



White





SRL 660

Color Temp: 3000K/4000K/5000K

Led Source: Cree 5050

Power: 5W/16W/36W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
5W	L55*W55*H45	L50*W50	38°
16W	L93*W93*H45	L88*W88	38°
36W	L130*W130*H45	L125*W125	38°

COLOR



5W-White



5W-Black



16W-White



16W-Black



36W-White



36W-Black



SRL 660

Color Temp: 3000K/4000K/5000K

Led Source: Cree 5050

Power: 12W/20W/40W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	L130*W55*H45	L125*W50	38°
20W	L205*W55*H45	L200*W50	38°
40W	L395*W55*H45	L390*W50	38°

COLOR



12W-White



12W-Black



20W-White



20W-Black



40W-White



40W-Black



SRL 661

Color Temp: 3000K/4000K
Led Source: TYF 3535
Power: 5W/10W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
5W	L73*W32*H47.5	L68*W25	30°
10W	L133*W32*H47.5	L128*W25	30°


COLOR



5W-White



10W-White

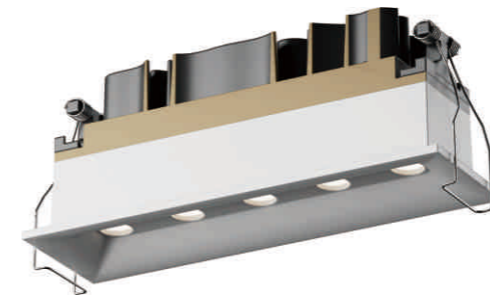

SRL 666

Color Temp: 3000K/4000K/CCT
Led Source: 3535
Power: 6W/10W/20W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
6W	L75*W34*H44	L65*W25	36°
10W	L113*W34*H44	L104*W25	36°
20W	L213*W34*H44	L204*W25	36°

COLOR



6W-White



6W-Black



10W-White




10W-Black



20W-White



20W-Black

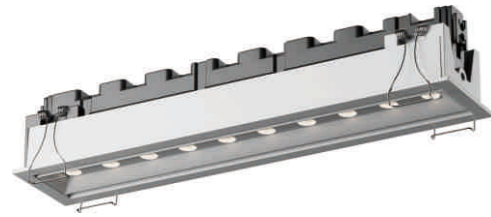

SRL 667

Color Temp: 3000K/4000K

Led Source: 3535

Power: 10W/20W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
10W	L117*W45*H44	L112*W38	36°
20W	L217*W45*H44	L212*W38	36°

COLOR



10W-White




20W-White



10W-Black



20W-Black

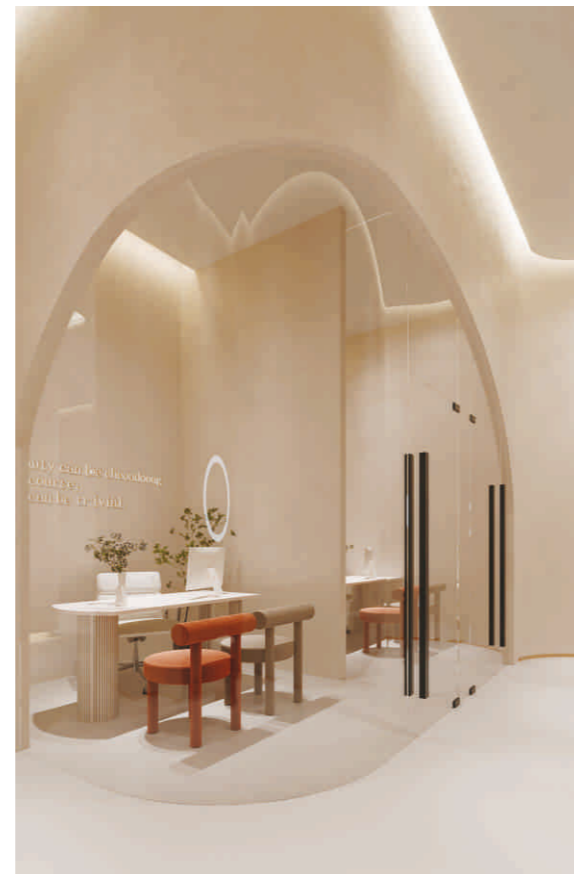

.....lightning your life, forever

LED
MAGNETIC
LIGHT



SRL 261

Color Temp: 3000K/4000K/CCT

Led Source: San an

Power: 10W/15W/20W



TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
10W	L300*W22*H25	/	100°
15W	L450*W22*H25	/	100°
20W	L600*W22*H25	/	100°

COLOR



10W-Black



15W-Black



20W-Black



SRL 262

Color Temp: 3000K/4000K/CCT
Led Source: Osram
Power: 6W/12W/18W/24W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
6W	L112*W22*H25	/	24°
12W	L220*W22*H25	/	24°
18W	L330*W22*H25	/	24°
24W	L440*W22*H25	/	24°

COLOR



6W-Black



12W-Black



18W-Black



24W-Black



SRL 263

Color Temp: 3000K/4000K
Led Source: Osram
Power: 6W/12W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
6W	L112*W22*H95	/	24°
12W	L220*W22*H95	/	24°

COLOR



6W-Black



12W-Black





SRL 264

Color Temp: 3000K/4000K/CCT

Led Source: Osram

Power: 6W/12W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
6W	L120*W22*H60	/	24°
12W	L220*W22*H60	/	24°

COLOR



6W-Black



12W-Black



SRL 265

Color Temp: 3000K/4000K/

Led Source: Cree COB

Power: 7W/12W/18W/24W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ35	/	38°
12W	Φ45	/	38°
18W	Φ60	/	38°
24W	Φ80	/	38°

COLOR



Black

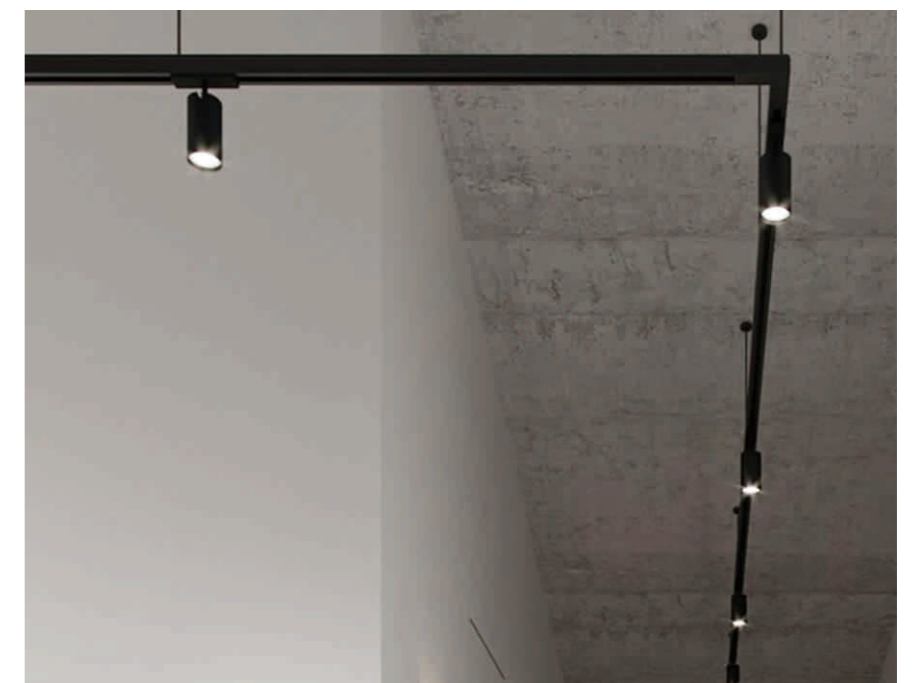



SRL 266

Color Temp: 3000K/4000K

Led Source: Cree

Power: 10W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
10W	Φ40*H300	/	24°

COLOR



Black



SRL 267

Color Temp: 3000K/4000K

Led Source: Cree

Power: 7W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ300	/	24°

COLOR



White+Black



SRL 268

POWER SUPPLY



100W

200W

TECHNICAL DATA

Power	Size/mm	Voltage
100W	L230*W20*H50	220V
200W	L300*W20*H50	220V



SRL 274

SRL 275

SRL 277

SRL 278

TECHNICAL DATA

Code	Discription	Size/mm	Type	Voltage
SRL 274	Ceiling Corner	W61*H46.5*T2	Conceal	DC48V
SRL 275	Wall Corner	W61*H46.5*T2	Conceal	DC48V
SRL 277	Ceiling Corner	W26.2*H50.4*T1.5	Surface	DC48V
SRL 278	Wall Corner	W26.2*H50.4*T1.5	Surface	DC48V



SRL 270

SRL 271

SRL 272

SRL 269

TECHNICAL DATA

Code	Discription	Size/mm	Voltage
SRL 270	Live Input Cable	L125*W16*H18	DC48V
SRL 271	Driver Connector	L138*W16*H18	DC48V
SRL 272	Live Track Connector	L125*W16*H18	DC48V
SRL 269	T Connector	L125*W16*H18	DC48V



SRL 279

SRL 280


SRL 281

SRL 282

SRL 283

TECHNICAL DATA

Code	Size/mm	Discription	Type	Finish
SRL 279	/	Side Connection Plate	/	Silver
SRL 280	/	Bottom Connection Plate	/	Silver
SRL 281	200	Manager Wire	/	Silver
SRL 282	W27*H51	End Cap For Track	Surface	Black
SRL 283	W27*H51	End Cap For Track	Conceal	Black

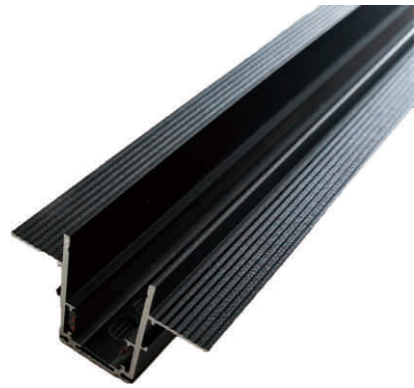

SRL 273

TRACK FOR MAGNETIC LIGHT

Size: 1M/2M/3M

TECHNICAL DATA

Code	Size/mm	Type	Voltage	Finish
1M	L100*W61*H46.5*T2	Trimless	DC48V	Black
2M	L200*W61*H46.5*T2	Trimless	DC48V	Black
3M	L300*W61*H46.5*T2	Trimless	DC48V	Black



SRL 276

TRACK FOR MAGNETIC LIGHT

Size: 1M/2M/3M

TECHNICAL DATA

Code	Size/mm	Type	Voltage	Finish
1M	L100*W50.4*H46.5*T1.5	Surface	DC48V	Black
2M	L200*W50.4*H46.5*T1.5	Surface	DC48V	Black
3M	L300*W50.4*H46.5*T1.5	Surface	DC48V	Black

.....lightning your life, forever



LED
WALL SURFACE
LIGHT



SRL 201

Color Temp: 3000K/4000K/6000K

Led Source: Epistar 2835

Power: 6W/15W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
6W	Φ75*H75	/	120°
15W	Φ110*H75	/	120°

COLOR



Gun Black



Rose Gold



SRL 202

Color Temp: 3000K/4000K

Led Source: Bridgelux COB

Power: 12W/18W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	Φ60*H110	/	38°
18W	Φ70*H135	/	38°

COLOR



Gun Black



Rose Gold





SRL 256

Color Temp: 3000K/6500K


Led Source: Epistar

Power: 5W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
SRL 256-5W	L62*W62*H26	/	67°

COLOR



White



SRL 400

Color Temp: 3000K/4000K

Led Source: Cree

Power: 12W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	L74*W74*H95	/	30°


COLOR



White



Black

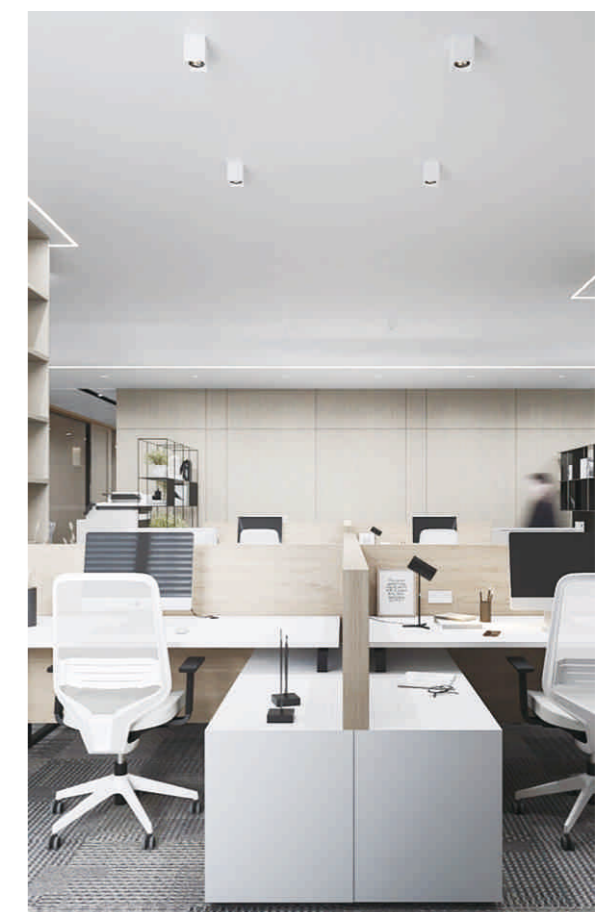



SRL 510

Color Temp: 3000K/4000K

Led Source: Bridgelux

Power: 12W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	Φ65*H170	/	38°

COLOR



White+Black



Black+chrome



Black+Rose Gold



SRL 520

Color Temp: 3000K/4000K

Led Source: Bridgelux

Power: 10W/20W/30W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
10W	Φ58*H100	/	38°
20W	Φ73*H135	/	38°
30W	Φ93*H158	/	38°

COLOR



White



Black





SRL 665

Color Temp: 3000K/4000K

Led Source: Cree 5050

Power: 5W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
5W	L49*W49*H83	/	38°

COLOR



White



Black



SRL 670

Color Temp: 3000K

Led Source: Samsung

Power: 25W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
25W	Φ90*H130	/	40°

COLOR



White





SRL 725

Color Temp: 3000K/4000K

Led Source: Cree/Bridgelux

Power: 12W/20W/30W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	L73*W73*H95	/	30°
20W	L95*W95*H110	/	30°
30W	L115*W115*H125	/	30°

COLOR




White



White+Black



Black



Black+Rose Gold



SRL 727

Color Temp: 3000K/4000K

Led Source: Bridgelux

Power: 7W/12W/20W/30W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ90*H102	/	60°
12W	Φ73*H95	/	30°
20W	Φ94*H110	/	30°
30W	Φ115*H110	/	30°

COLOR



White



White+Black



White+Rose Gold



Black



Black+White



Black+Rose Gold



SRL 728

Color Temp: SWITCH 3 IN 1

Led Source: SMD

Power: 7W/12W

Pre Select

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ76*H55	/	120°
12W	Φ119*H55	/	120°

COLOR



White



Black



SRL 729

Color Temp: 3000K/4000K

Led Source: Bridgelux

Power: 12W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	Φ72*H87	/	38°

COLOR



White



Black





SRL 730

Color Temp: 3000K/4000K

Led Source: Bridgelux

Power: 10W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
10W	Φ64*H57	/	38°

COLOR



Rose Gold

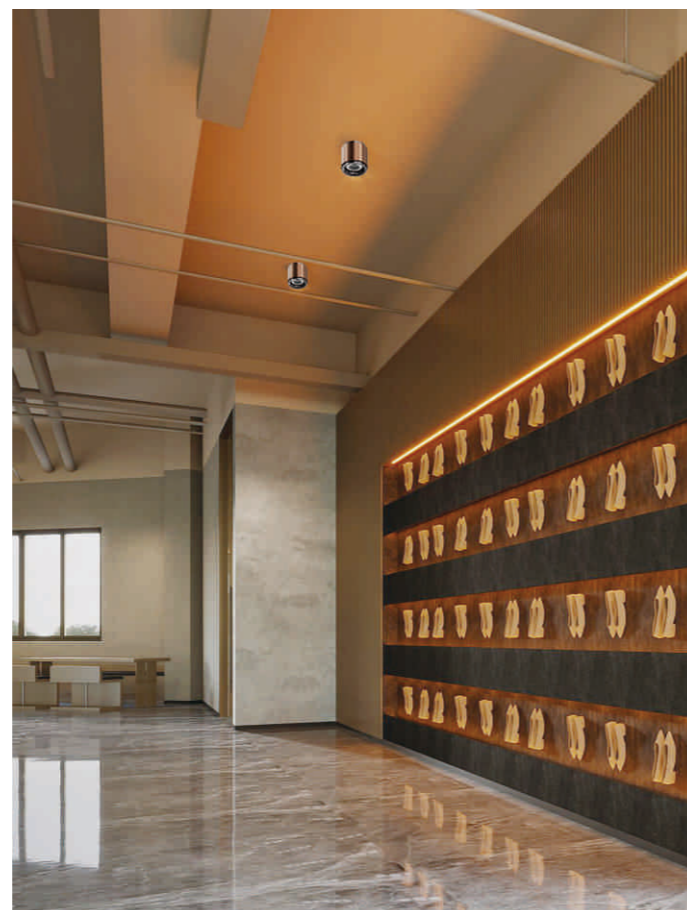

SRL 762

Color Temp: 3000K/4000K

Led Source: Bridgelux COB

Power: 7W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W	Φ57*H69	/	40°


COLOR



White



Black

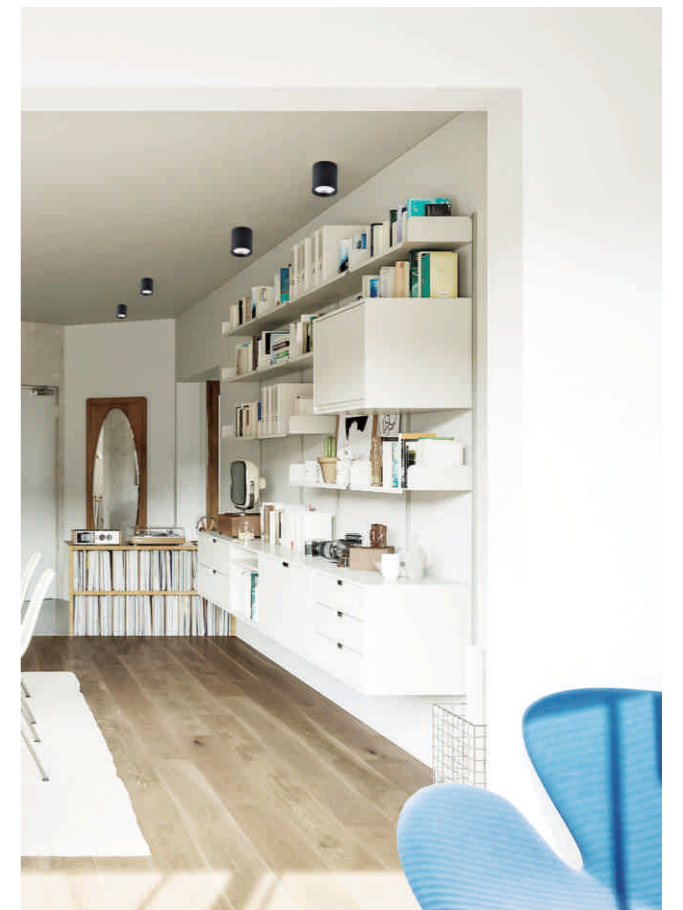



SRL 7530

Color Temp: 3000K

Led Source: Cree

Power: 12W

2 Line Track

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	L76*W76*H163	/	24°

COLOR



White



.....lightning your life, forever

LED
MR-16
LAMP





SRL 936

Color Temp: 3000K/4000K/5000K

Led Source: Citizen

Power: 10W/14W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
10W	Φ50*H58	/	20°/38°
14W	Φ50*H80	/	20°/38°

COLOR



Silver



SRL 940

Color Temp: 3000K/4000K/6000K/CCT

Led Source: Cree

Power: 12W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	Φ50*H63	/	38°

COLOR



Black



White





SRL 942/944

Color Temp: 3000K/4000K

Led Source: San an

Power: 7W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
7W-MR16	Φ50*H50	/	38°
7W-GU10	Φ50*H50	/	38°

COLOR



MR16-White



GU10-White



.....lightning your life, forever

LED
STEAM PROOF
LIGHT





SRL 302

Color Temp: 3000K/4000K/5000K

Led Source: Samsung

Power: 5W/10W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
5W	Φ60*H45	Φ45	40°
10W	Φ70*H45	Φ60	40°

COLOR



5W-White



10W-White



SRL 316

Color Temp: 3000K/4000K/6000K

Led Source: Bridgelux

Power: 12W

Steamproof

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	Φ83*H65	Φ75	55°


COLOR



White



Black

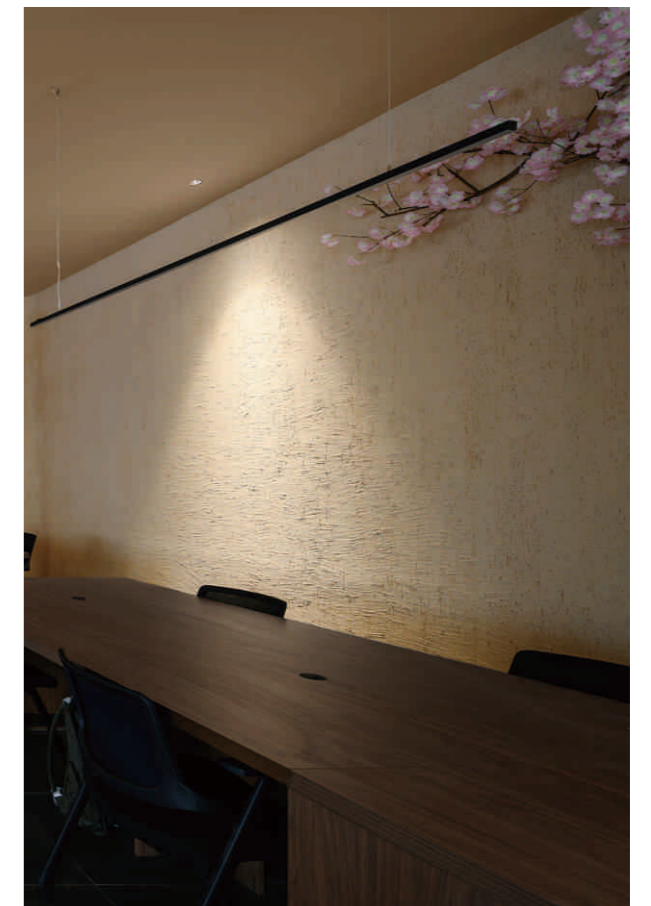

LED DOWNLIGHT



SRL 401

Color Temp: 3000K/4000K/6000K

Led Source: LG

Power: 12W/24W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	Φ105*H80	Φ90	90°
24W	Φ160*H80	Φ140	90°

COLOR



White

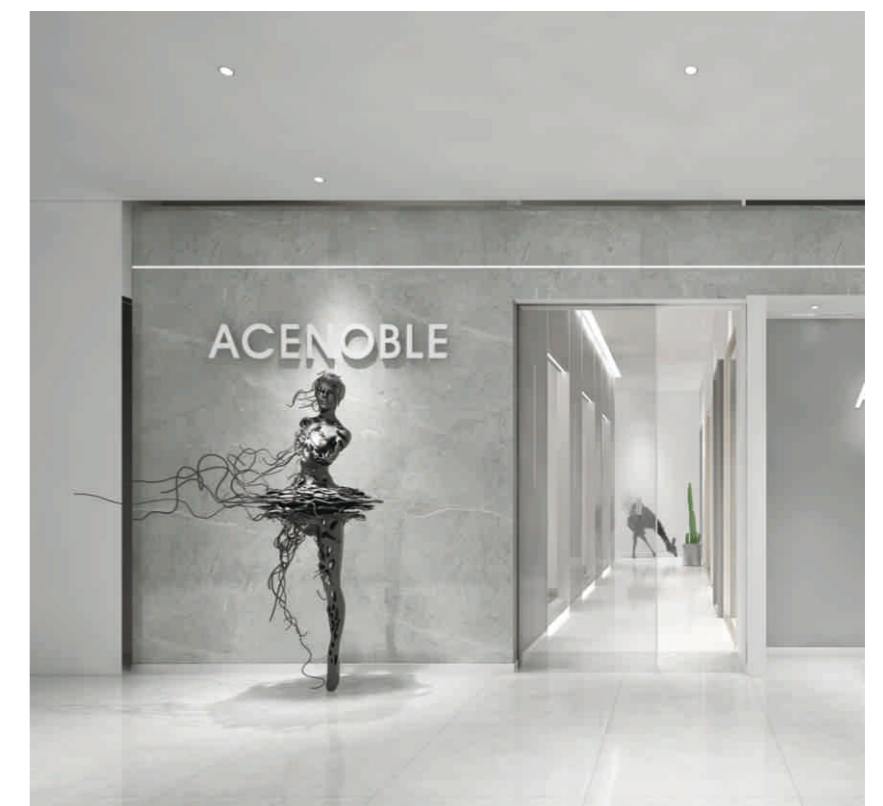



SRL 405

Color Temp: 3000K/4000K/6500K

Led Source: 2835 SMD

Power: 8W/15W/22W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
8W	L104*W104*H53	L90*W90	160°
15W	L157*W157*H53	L145*W145	160°
22W	L184*W184*H53	L175*W175	160°

COLOR



White



SRL 406

Color Temp: 3000K/4000K/6500K

Led Source: 2835 SMD

Power: 8W/15W/22W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
8W	Φ104*H53	Φ90	160°
15W	Φ157*H53	Φ145	160°
22W	Φ184*H53	Φ175	160°

COLOR



White

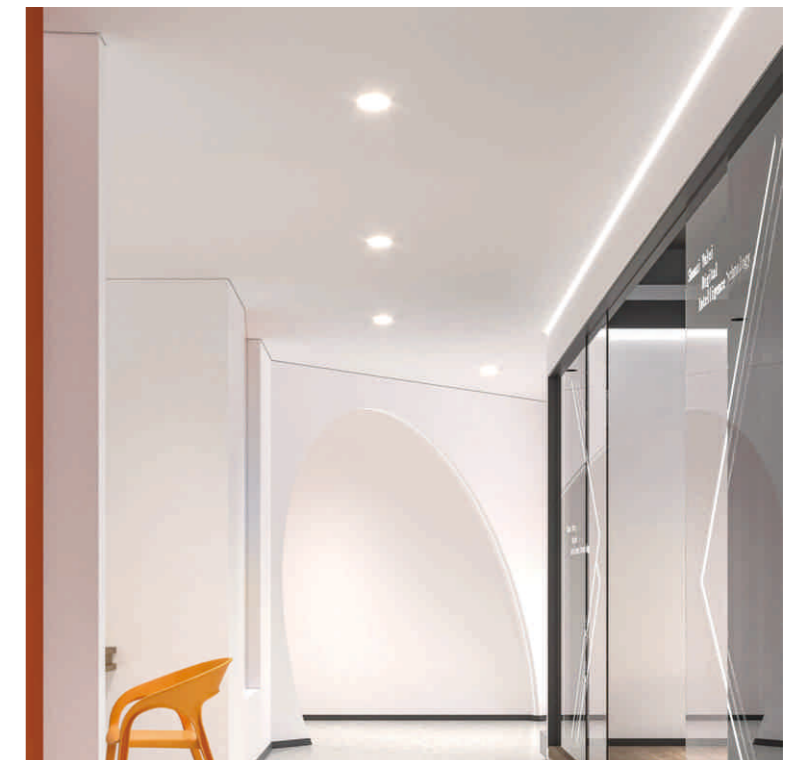



SRL 407

Color Temp: 3000K/4000K/6000K

Led Source: 2835 SMD

Power: 12W/18W/24W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	Φ120*H50	Φ110	120°
18W	Φ150*H50	Φ137	120°
24W	Φ170*H50	Φ160	120°

COLOR



White



SRL 408

Color Temp: 3000K/4000K/6000K/CCT

Led Source: 2835 SMD

Power: 12W/18W/24W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	Φ91*H45	Φ80	120°
18W	Φ105*H53	Φ92	120°
24W	Φ128*H67	Φ115	120°

COLOR



White





SRL 423

Color Temp: 4000K/6000K

Led Source: Bridgelux

Power: 15W/20W/25W/36W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
15W	Φ115*H32	Φ105	120°
20W	Φ152*H32	Φ140	120°
25W	Φ165*H32	Φ155	120°
36W	Φ216*H32	Φ205	120°

COLOR



White



SRL 423

Color Temp: CCT/3 IN 1

Led Source: Bridgelux

Power: 12W/20W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	Φ85*H32	Φ75	120°
20W	Φ115*H32	Φ105	120°

COLOR



White





SRL 844

Color Temp: 3000K/4000K/6000K/CCT/3 IN 1

Led Source: TYF 2835

Power: 12W/18W/24W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	Φ83*H38	Φ75	90°
18W	Φ104*H42	Φ95	90°
24W	Φ135*H44	Φ120	90°

COLOR



White



White+Black



White+Rose Gold

.....lightning your life, forever





SRL 402

Color Temp: 3000K/6500K

Led Source: 3014 SMD Epistar

Power: 8W/11W/15W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
8W	Φ112*H19	Φ100	90°
11W	Φ163*H19	Φ150	90°
15W	Φ216*H19	Φ200	90°

COLOR



White

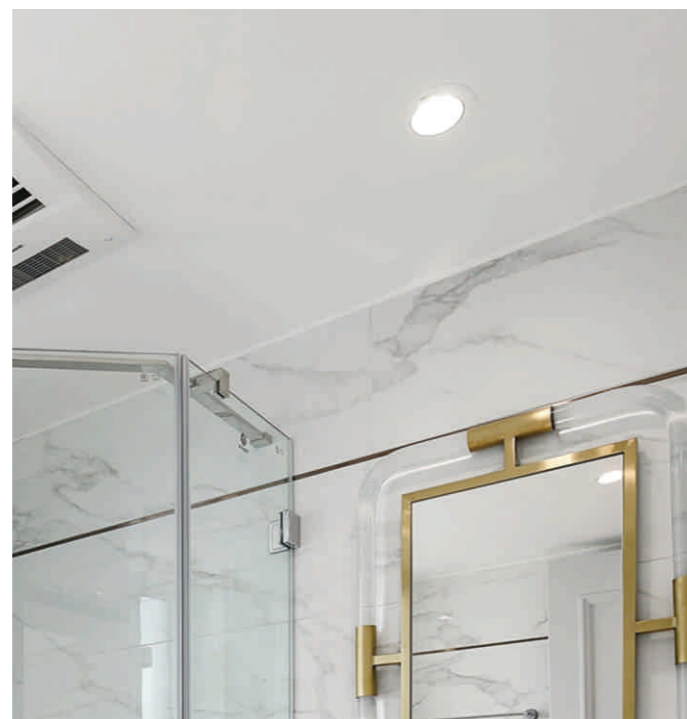

SRL 403

Color Temp: 3000K/6500K

Led Source: 3014 SMD Epistar

Power: 8W/15W/22W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
8W	L108*W108*H19	L96*W96	90°
15W	L168*W168*H19	L152*W152	90°
22W	L220*W220*H19	L204*W204	90°

COLOR



White

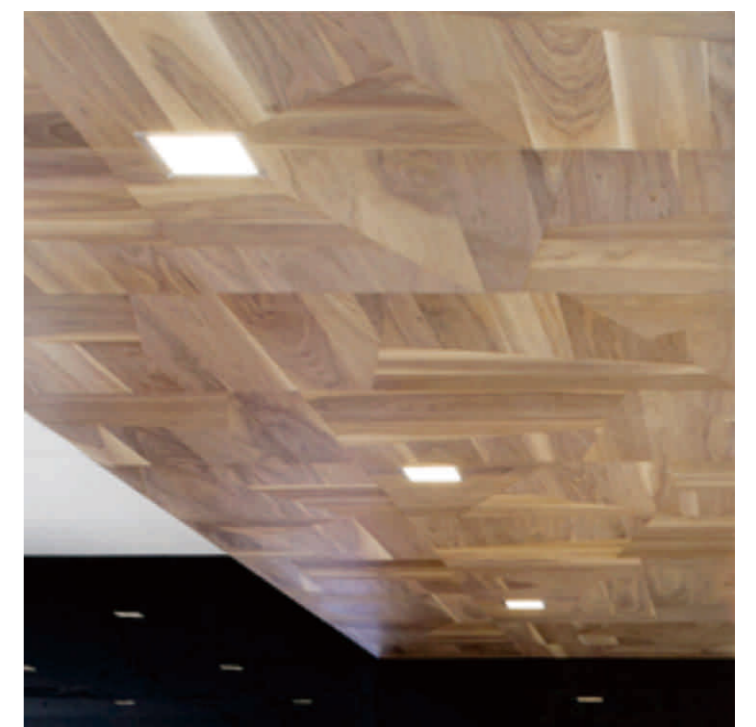



SRL 411

Color Temp: 3000K/6500K

Led Source: 3014 SMD Epistar

Power: 8W/11W/15W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
8W	Φ117*H39	/	90°
11W	Φ180*H39	/	90°
15W	Φ240*H39	/	90°



SRL 412

Color Temp: 3000K/6500K

Led Source: 3014 SMD Epistar

Power: 8W/15W/22W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
8W	L108*W108*H39	/	90°
15W	L168*W168*H39	/	90°
22W	L240*W240*H39	/	90°

COLOR



White

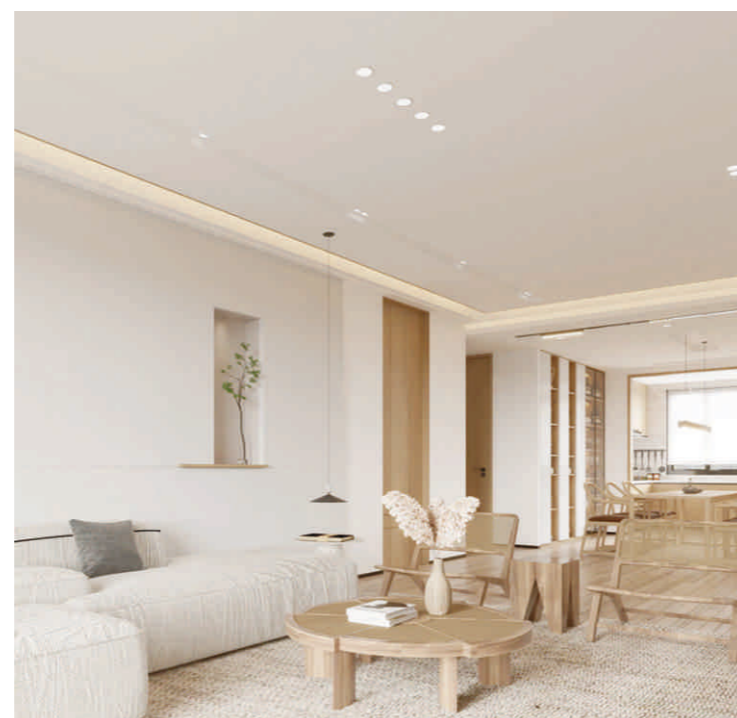

COLOR



White





SRL 421

Color Temp: 3000K/4200K/6500K/3 IN 1

Led Source: SMD 2835

Power: 8W/15W/22W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
8W	L120*W120	L100*W100	90°
15W	L170*W170	L150*W150	90°
22W	L225*W225	L200*W200	90°

COLOR



White

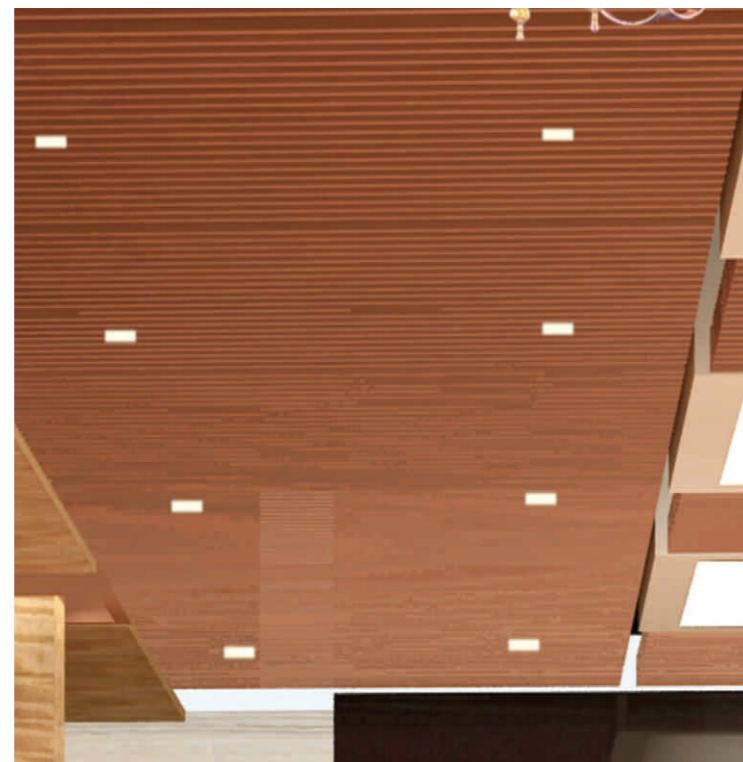

SRL 422

Color Temp: 3000K/4200K/6500K/3 IN 1

Led Source: SMD 2835

Power: 8W/15W/22W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
8W	Φ120	Φ100	38°
15W	Φ170	Φ150	38°
22W	Φ225	Φ200	38°

COLOR



White





SRL 801

Color Temp: 3000K/4000K/6000K

Led Source: 2835 SMD Epistar

Power: 6W/12W/18W



TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
6W	Φ93*H37	Φ85	90°
12W	Φ128*H37	Φ120	90°
18W	Φ158*H37	Φ150	90°

COLOR



White

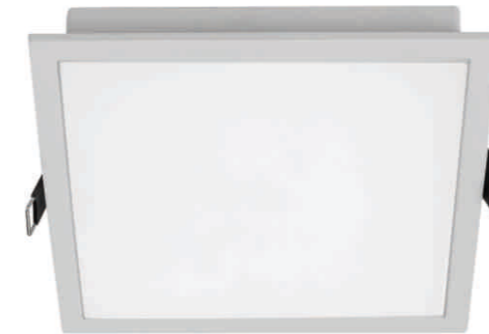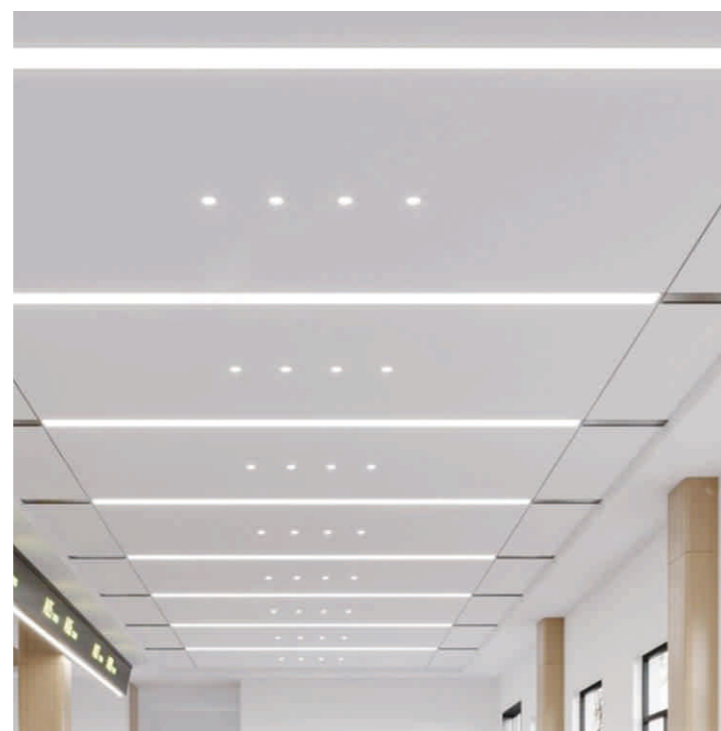

SRL 802

Color Temp: 3000K/4000K/6000K

Led Source: 2835 SMD Epistar

Power: 6W/12W/18W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
6W	L93*W93*H37	L85*W85	90°
12W	L128*W128*H37	L120*W120	90°
18W	L158*W158*H37	L150*150	90°

COLOR



White





SRL 811

Color Temp: 3000K/4000K/6000K

Led Source: 3014 SMD Epistar

Power: 8W/15W/22W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
8W	Φ88*H23	Φ75	90°
15W	Φ145*H23	Φ130	90°
22W	Φ170*H23	Φ155	90°

COLOR



White

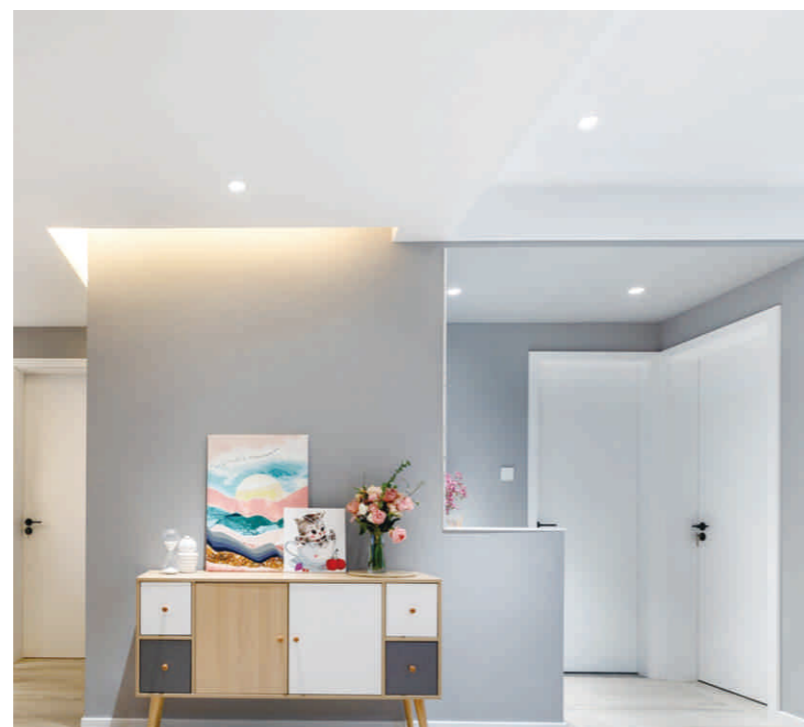

SRL 812

Color Temp: 3000K/4000K/6000K

Led Source: 3014 SMD Epistar

Power: 8W/15W/22W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
8W	L88*W88*H23	L75*W75	90°
15W	L145*W145*H23	L130*W130	90°
22W	L170*W170*H23	L155*W155	90°

COLOR



White





SRL 813

Color Temp: 3000K/4000K/6500K

Led Source: 3014 SMD Epistar

Power: 8W/15W/22W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
8W	Φ88*H23	/	90°
15W	Φ145*H23	/	90°
22W	Φ170*H23	/	90°

COLOR



White



SRL 814

Color Temp: 3000K/4000K/6500K

Led Source: 3014 SMD Epistar

Power: 8W/15W/22W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
8W	L88*W88*H23	/	90°
15W	L145*W145*H23	/	90°
22W	L170*W170*H23	/	90°

COLOR



White

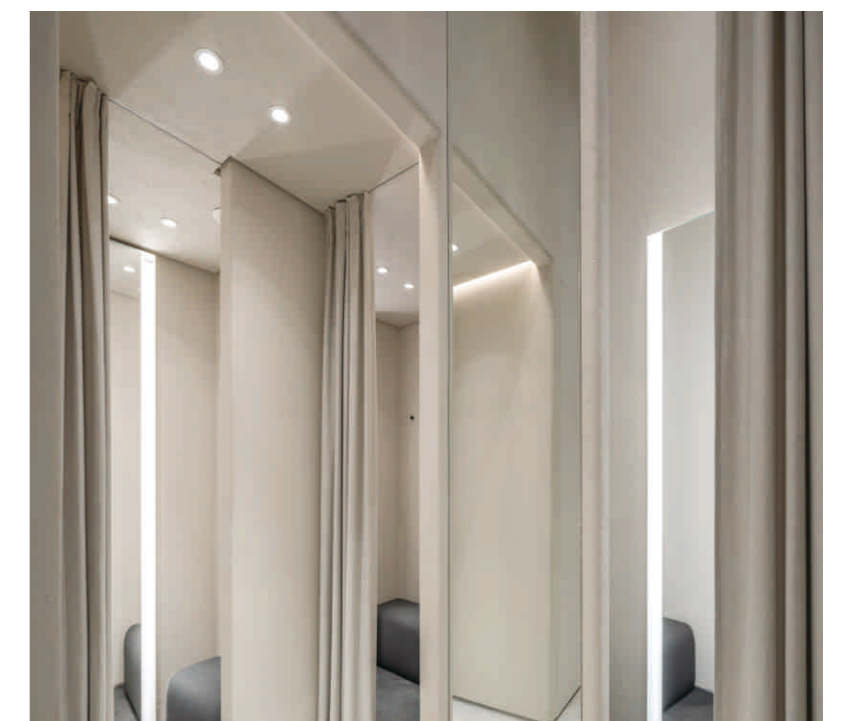



SRL 502

Color Temp: 3000K/5000K

Led Source: Epistar/Samsung

Power: 30W/40W


TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle	Led Source
30W	L235*W146*H132	L220*W132	99°	Epistar
40W	L203*W131	L175*W110	40°	Samsung

COLOR



White

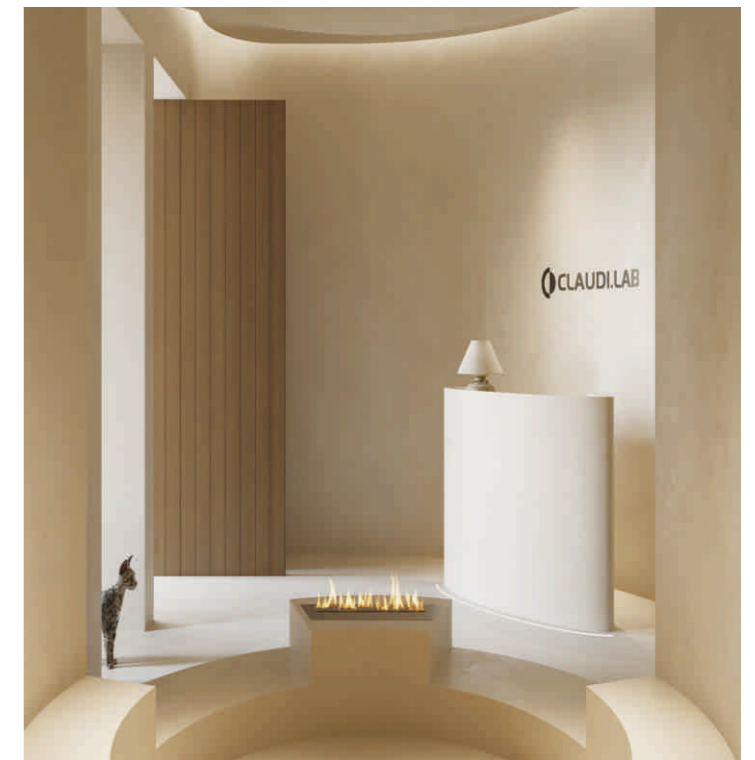



SRL 501

Color Temp: 3000K/6500K

Led Source: Epistar

Power: 8W/20W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
8W	Φ108*H80	Φ98	92°
20W	Φ180*H154	Φ172	68°

COLOR



White



SRL 501

Color Temp: 3000K/4000K/5000K

Led Source: Samsung COB

Power: 25W/40W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
25W	Φ139*H110	Φ120	40°
40W	Φ163*H135	Φ145	40°

COLOR



White





SRL 203

Color Temp: 3000K/4000K

Led Source: Bridgelux COB

Power: 8W/15W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
8W	Φ45*H110	/	38°
15W	Φ70*H135	/	38°

COLOR



Gun Black



Rose Gold





SRL 206

Color Temp: CCT/3 IN 1
Led Source: Bridgelux COB
Power: 10W/30W
Pre Select

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
10W	Φ57*H120	/	36°
30W	Φ85*H142	/	36°

COLOR



White



Black



SRL 531/532/533

Color Temp: 3000K/4000K/5000K
Led Source: Samsung
Power: 15W/25W/35W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
SRL 531-15W	L127*W125*H55	/	40°
SRL 532-25W	L164*W150*H70	/	40°
SRL 533-35W	L176*W167*H83	/	40°

COLOR



White





SRL 540

Color Temp: 3000K/4000K

Led Source: Cree

Power: 9W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
9W	L50*W80*H170	/	24°



SRL 541

Color Temp: 3000K/4000K

Led Source: Cree

Power: 30W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
30W	L200*W220*H120	/	38°

COLOR



White



Black



COLOR



White





SRL 550

Color Temp: 3000K/4000K

Led Source: Cree

Power: 30W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
30W	L190*W140*H95	/	38°

COLOR



White



Black



SRL 552

Color Temp: 3000K

Led Source: Cree

Power: 20W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
20W	L188*W147*H108	/	38°

COLOR



White





SRL 553

Color Temp: 3000K
Led Source: Epistar
Power: 23W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
23W	L145*W305*H290	/	60°

COLOR



White



SRL 557

Color Temp: 3000K/4000K/5000K
Led Source: Samsung
Power: 40W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
40W	L203*W212*H94	/	40°

COLOR



White





SRL 561

Color Temp: 3000K/4000K/6500K

Led Source: Epistar

Power: 20W/30W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
20W	L125*W135*H90	/	24°
30W	L182*W217*H128	/	24°

COLOR



White



SEG 562

Color Temp: 3000K/4000K/6000K

Led Source: Bridgelux

Power: 12W/20W/30W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
12W	Φ50*H125	/	45°
20W	Φ65*H158	/	45°
30W	Φ76*H178	/	45°


COLOR



White



Black

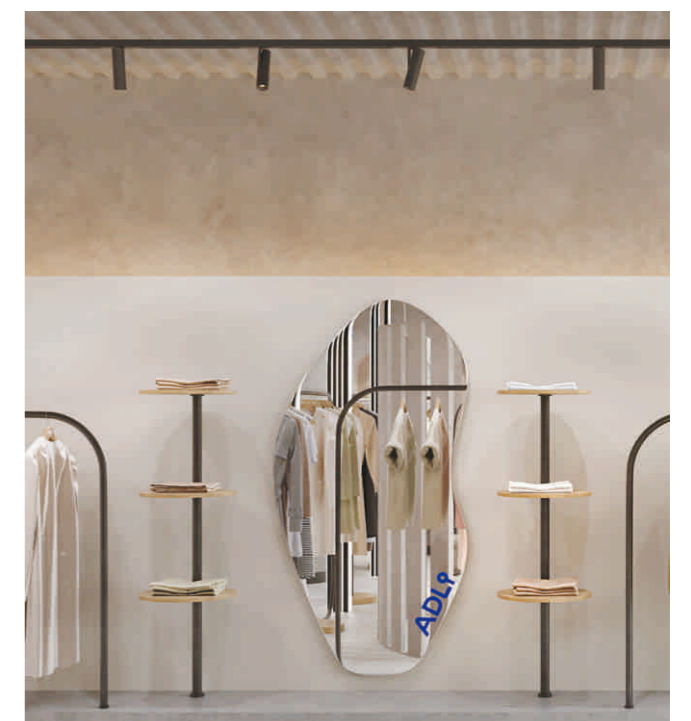



SRL 566

Color Temp: 3000K/4000K

Led Source: Bridgelux

Power: 9W/16W

TECHNICAL DATA

Power	Size/mm	Cut Out/mm	Beam Angle
9W	Φ50*H145	/	15-°40°-60°
16W	Φ62*H180	/	15-°40°-60°


COLOR



White



Black

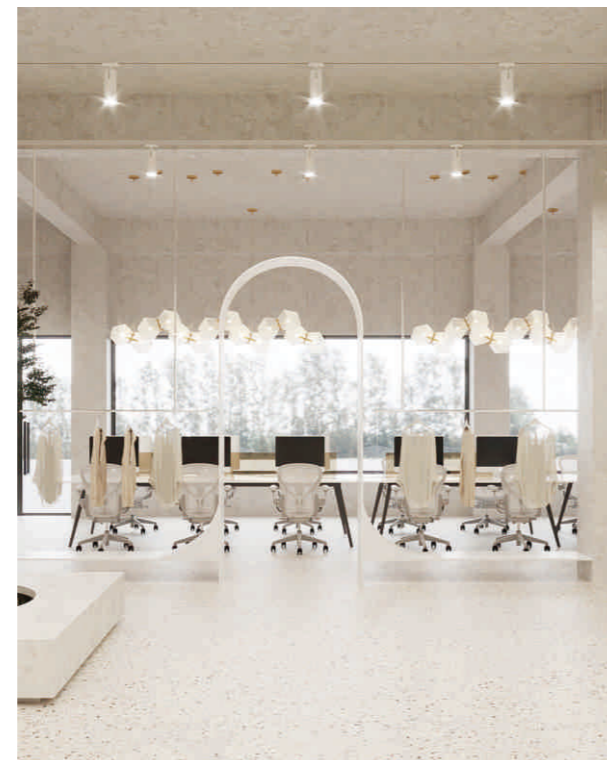

SRL 051

2 Line Aluminum Track

3 Line Aluminum Track

COLOR



White



Black



SRL 053

2 Way Jointer



SRL 054

3 Way Jointer




SRL 055

4 Way Jointer



LED
STRIP
& DRIVER

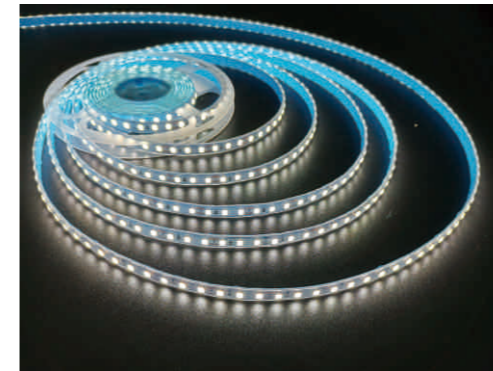

2835-12V


IP Grade: IP 20

Voltage: 12V

10mm PCB

TECHNICAL DATA

Code	Led/Mtr	Watt/Mtr	PCB	Color Temp
SRL 331	60 LED	6W	2OZ 10mm	3000K/4000K/6000K
SRL 330	120 LED	12W	2OZ 10mm	3000K/4000K/6000K/Red/ Green/Blue/Pink/Amber
SRL 333	168 LED	18W	3OZ 10mm	3000K/4000K/6000K/Red/ Green/Blue/Pink/Amber/Purple
SRL 339	240 LED	24W	3OZ 10mm	3000K/4000K/6000K
SRL 343	120 LED	12W	2OZ 10mm	RGB
SRL 348	120 LED	12W	3OZ 10mm	CCT
SRL 349	160 LED	18W	3OZ 10mm	CCT

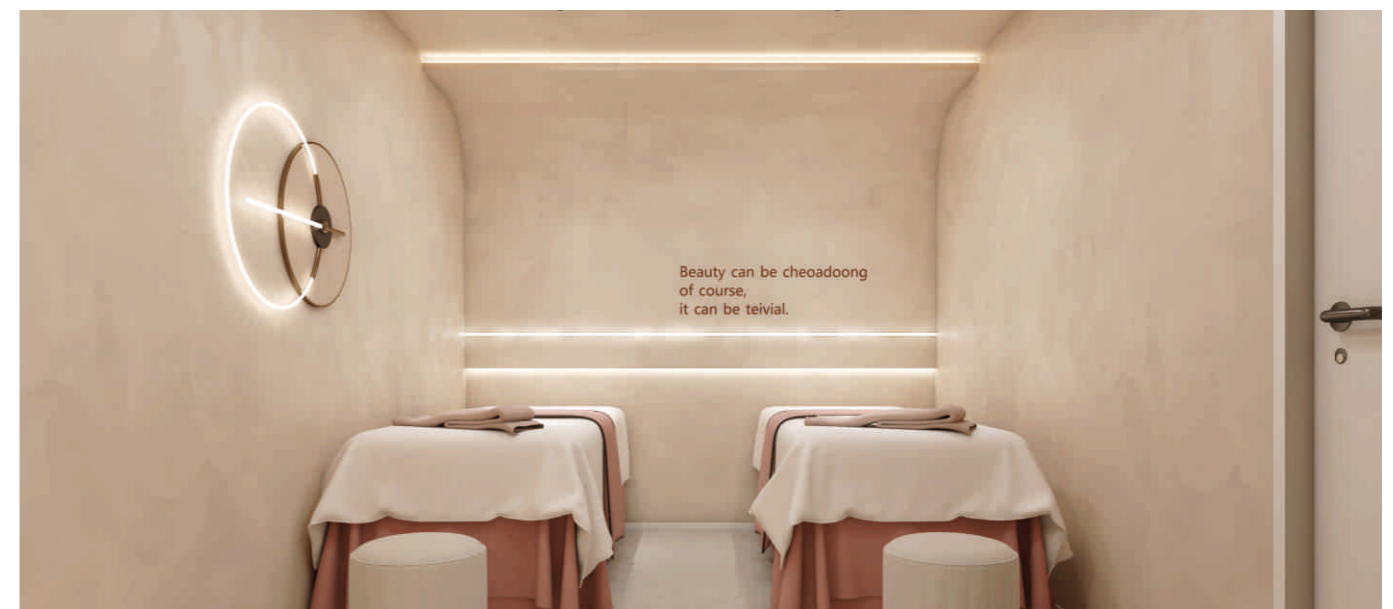

Beauty can be cheadoong
of course,
it can be teivial.



2835-12V

IP Grade: IP 20

Voltage: 12V

5 mm PCB

TECHNICAL DATA

Code	Led/Mtr	Watt/Mtr	PCB	Color Temp
SRL 328	120 LED	12W	2OZ 5mm	3000K/4000K
SRL 337	180 LED	18W	3OZ 5mm	3000K/4000K



2835-12V

IP Grade: **IP 65**


Voltage: 12V

10mm PCB

TECHNICAL DATA

Code	Led/Mtr	Watt/Mtr	PCB	Color Temp
SRL 333	60 LED	6W	2OZ 10mm	3000K
SRL 327	120 LED	12W	2OZ 10mm	3000K/4000K
SRL 326	180 LED	18W	3OZ 10mm	3000K/4000K
SRL 328	240 LED	24W	3OZ 10mm	3000K/4000K



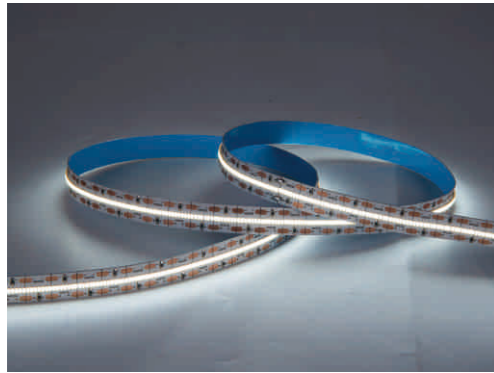

2835-24V

IP Grade: IP 20

Voltage: 24V

5mm & 10mm PCB



3535-12V

IP Grade: IP 20

Voltage: 12V

10mm PCB


TECHNICAL DATA

Code	Led/Mtr	Watt/Mtr	PCB	Color Temp
SRL 344	120 LED	12W	2OZ 5mm	3000K/4000K/6000K
SRL 344	120 LED	12W	2OZ 10mm	3000K/4000K
SRL 348	180 LED	18W	3OZ 10mm	3000K/4000K
SRL 340	240 LED	24W	3OZ 10mm	3000K/4000K

TECHNICAL DATA

Code	Led/Mtr	Watt/Mtr	PCB	Color Temp
SRL 342	144 LED	14W	3OZ 10mm	RGB



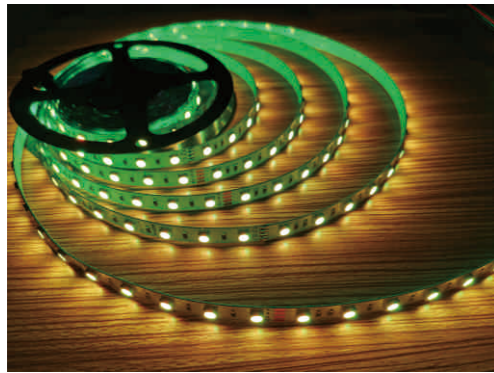


5050-12V

IP Grade: IP 20

Voltage: 12V

10mm PCB

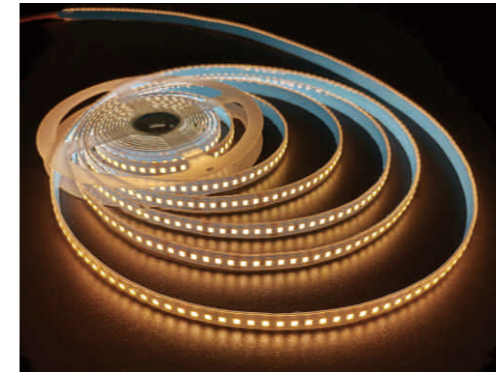

5050-24V

IP Grade: IP 20

Voltage: 24V

10mm PCB

TECHNICAL DATA

Code	Led/Mtr	Watt/Mtr	PCB	Color Temp
SRL 321	60 LED	14W	2OZ 10mm	3000K/4000K/6000K
SRL 323	60 LED	14W	3OZ 10mm	RGB
SRL 338	60 LED	14W	3OZ 10mm	RGB/WW
SRL 339	60 LED	14W	3OZ 10mm	RGB/WW/W

TECHNICAL DATA

Code	Led/Mtr	Watt/Mtr	PCB	Color Temp
SRL 330	60 LED	8W	2OZ 10mm	3000K





COB-12V

IP Grade: IP 20


Voltage: 12V

10mm PCB

Dotless

TECHNICAL DATA

Code	Led/Mtr	Watt/Mtr	PCB	Color Temp
SRL 350	384 LED	10W	3OZ 10mm	3000K/4000K
SRL 351	608 LED	14W	3OZ 10mm	CCT

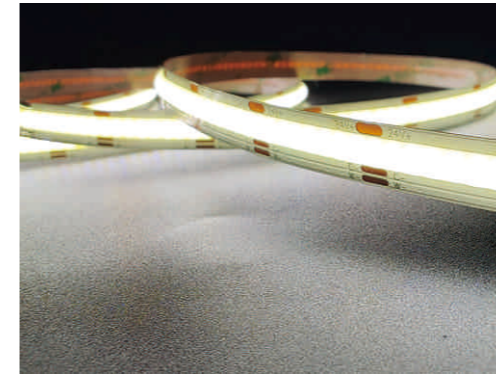

COB-24V

IP Grade: IP 20

Voltage: 24V

5mm & 10mm PCB

Dotless

TECHNICAL DATA

Code	Led/Mtr	Watt/Mtr	PCB	Color Temp
SRL 350	384 LED	10W	3OZ 10mm	3000K/4000K
SRL 350	384 LED	10W	3OZ 5mm	3000K/4000K





12V DRIVER


Voltage: 12V

**Power: 24W/36W/60W/100W/120W
150W/200W/300W/400W**

TECHNICAL DATA

Code	Power	Size/mm	AMP
SRL 101	24W	L90*W40*H22	2A
SRL 102	36W	L100*W40*H22	3A
SRL 103	60W	L113*W49.5*H22	5A
SRL 104	100W	L137*W49.5*H22	8.5A
SRL 105	120W	L137*W49.5*H22	10A
SRL 106	150W	L177*W49.5*H22	12.5A
SRL 107	200W	L177*W49.5*H22	16.5A
SRL 108	300W	L204*W49.5*H22	25A
SRL 109	400W	L204*W49.5*H22	33.5A

COLOR

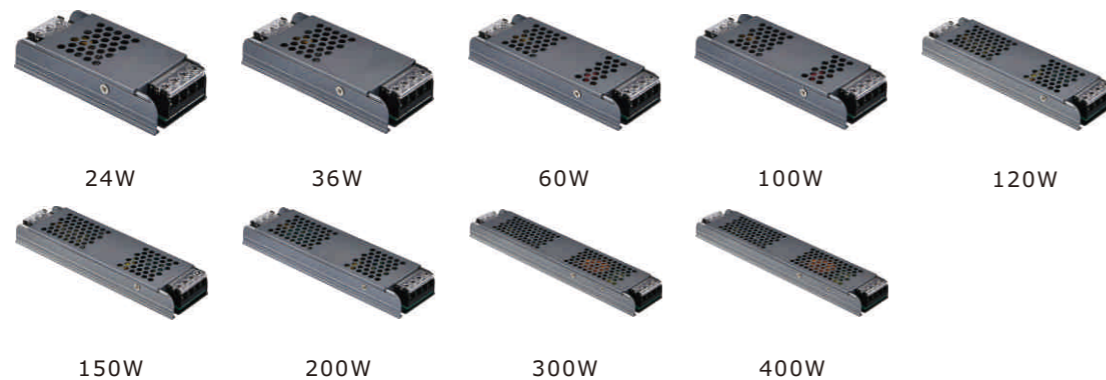

24V DRIVER


Voltage: 24V

**Power: 60W/100W/120W
200W/300W/400W**

TECHNICAL DATA

Code	Power	Size/mm	AMP
SRL 203	60W	L113*W49.5*H22	2.5A
SRL 205	120W	L137*W49.5*H22	5A
SRL 207	200W	L177*W49.5*H22	8.25A
SRL 208A	240W	L204*W49.5*H22	10A
SRL 208	300W	L204*W49.5*H22	12.5A
SRL 209	400W	L204*W49.5*H22	16.75A

COLOR

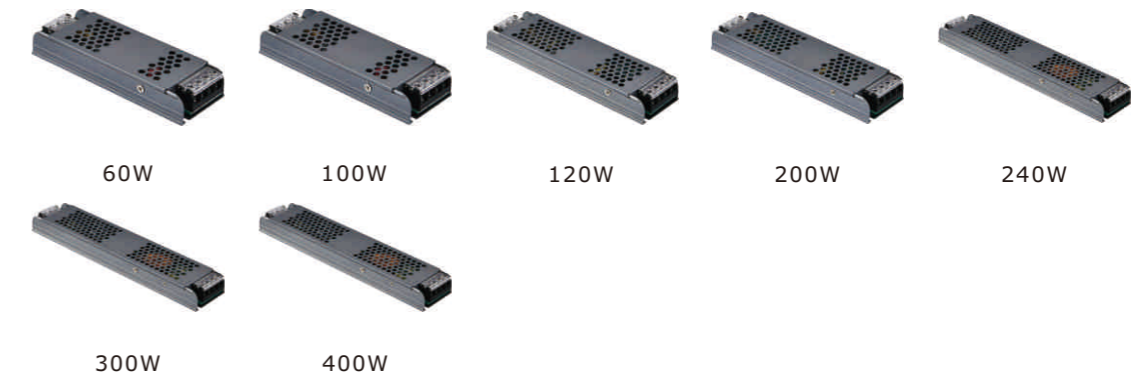




SMART DRIVER

Input Voltage: 100~240VAC

TECHNICAL DATA

Code	Output Voltage	Output Current	Size/mm
SRL D520	6-20V	350-600mA	L110*W20*H22
SRL D515	12-24V	150-300mA	L100*W35*H25
SRL D1830	12-42V	450-600mA	L125*W35*H25
SRL D1824	45-85V	150-300mA	L125*W35*H25

COLOR

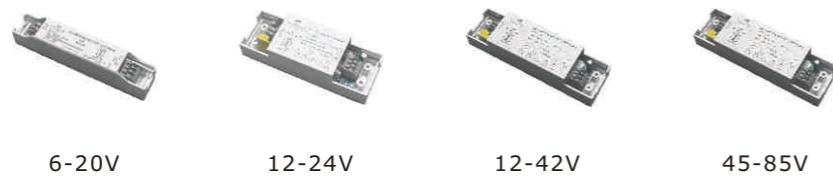


REMOTE
MRP 1000/-



GATEWAY
MRP 4000/-



POWER ADAPTER

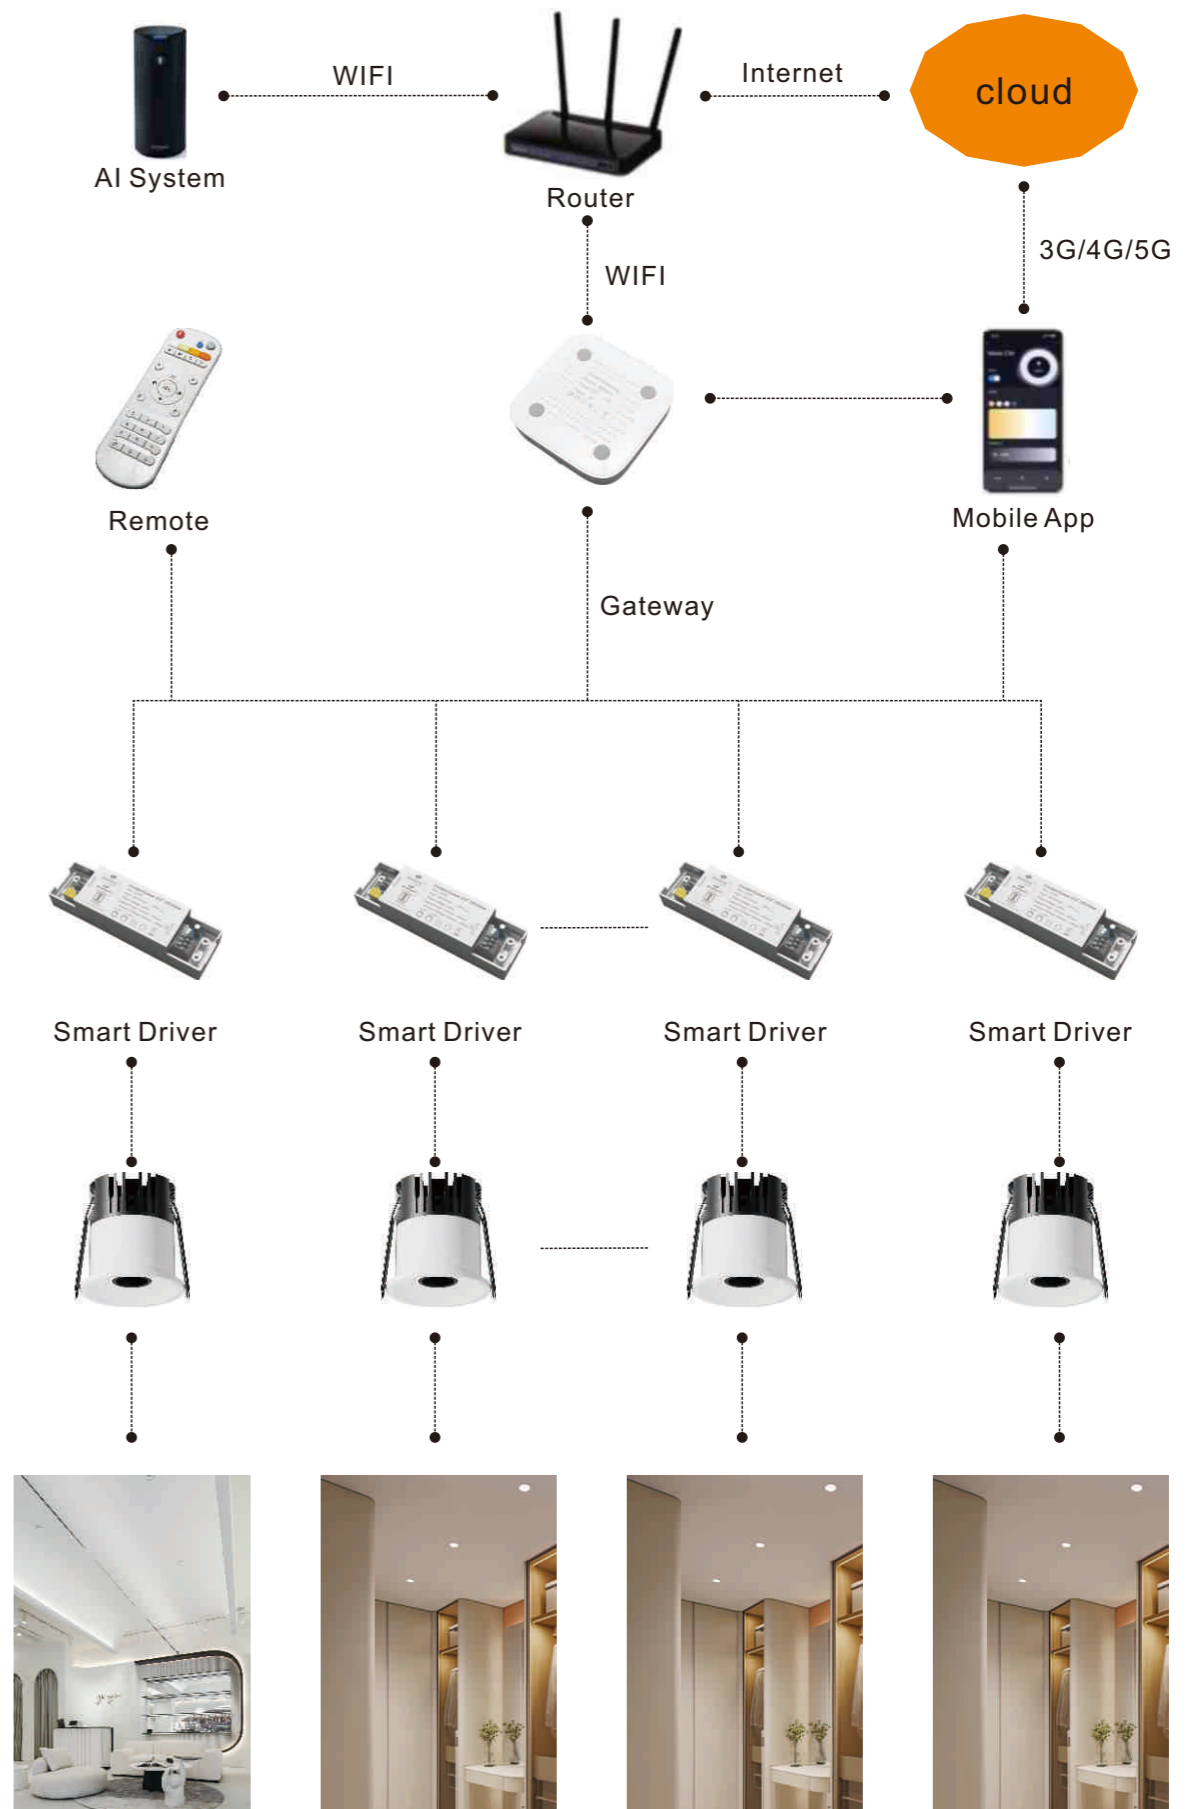



.....lightning your life, forever



SRL 66-102



SRL 66-202



SRL 7829-1



SRL 7829-2

TECHNICAL DATA

Code	Size/mm	Cut Out/mm	Finish
SRL 66-102	L105*W105*H55	L85*W85	White
SRL 66-202	L185*W105*H55	L160*W85	White
SRL 7829-1	L93*W93*H26	L80*W80	Silver
SRL 7829-2	L174*W93*H26	L160*W80	Silver



SRL 851



SRL 853-1



SRL 853-2

TECHNICAL DATA

Code	Size/mm	Cut Out/mm	Finish
SRL 851	Φ85*H125	Φ75	White
SRL 853-1	L110*W110	L103*W103	White
SRL 853-2	L200*W110	L192*W103	White



SRL 852-1



SRL 852-2



SRL 852-2

TECHNICAL DATA

Code	Size/mm	Cut Out/mm	Finish
SRL 852-1	L95*W95*H25	Φ75	White
SRL 852-2	L175*W95*H25	L150*W74	White
SRL 852-2	L175*W95*H25	L150*W75	Black



SRL 861



SRL 862



SRL 865



SRL 866

TECHNICAL DATA

Code	Size/mm	Cut Out/mm	Finish
SRL 861	L95*W95	Φ80	White
SRL 862	L80*W80	Φ70	White
SRL 865	Φ89	Φ83	Silver
SRL 866	L90*W90	Φ80	Silver



SRL 857



SRL 858



SRL 860

TECHNICAL DATA

Code	Size/mm	Cut Out/mm	Finish
SRL 857	Φ95*H45	Φ76	White
SRL 858	L95*W95	Φ90	White
SRL 860	Φ95	Φ80	White



SRL 867



SRL 868



SRL 869



SRL 870

TECHNICAL DATA

Code	Size/mm	Cut Out/mm	Finish
SRL 867	Φ95	Φ85	White+Gold
SRL 868	Φ95	Φ85	White+Copper
SRL 869	Φ95	Φ85	Black+Gold
SRL 870	Φ95	Φ85	Black+Copper